

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

APPLICATION FOR PERMIT TO DRILL OR REENTER



FORM APPROVED
OMB No. 1004-0137
Expires March 31, 2007

1a. Type of work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		5. Lease Serial No. UTU-82698
1b. Type of Well: <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		6. If Indian, Allottee or Tribe Name
2. Name of Operator EOG RESOURCES, INC		7. If Unit or CA Agreement, Name and No.
3a. Address 1060 EAST HIGHWAY 40 VERNAL, UT 84078	3b. Phone No. (include area code) 303-824-5526	8. Lease Name and Well No. Big Wash 51-09GR
4. Location of Well (Report location clearly and in accordance with any State requirements.)* At surface 575408 2175' FSL & 845' FEL (NESE) 39.957106 LAT 110.117897 LON At proposed prod. zone Same 44231624 39.957129 110.117172		9. API Well No. 43013-33545
10. Field and Pool, or Exploratory Natural Bottom/Green River		11. Sec., T. R. M. or Blk. and Survey or Area Sec. 9-T10S-R16E, S.L.B.&M
14. Distance in miles and direction from nearest town or post office* 21.6 miles south of Myton, Utah		12. County or Parish Duchesne County
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 660' Lease line 660' Drilling Unit Line		13. State UT
16. No. of acres in lease 960		17. Spacing Unit dedicated to this well 40 acres
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft.		20. BLM/BIA Bond No. on file NM 2308
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 6160' GL		22. Approximate date work will start*
23. Estimated duration 45 days		

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No.1, must be attached to this form:

- | | |
|--|---|
| 1. Well plat certified by a registered surveyor. | 4. Bond to cover the operations unless covered by an existing bond on file (see Item 20 above). |
| 2. A Drilling Plan. | 5. Operator certification |
| 3. A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office). | 6. Such other site specific information and/or plans as may be required by the BLM. |

25. Signature 	Name (Printed/Typed) Mary A. Maestas	Date 02/14/2007
Title Regulatory Assistant		
Approved by (Signature) 	Name (Printed/Typed) BRADLEY G. HILL	Date 02-21-07
Title ENVIRONMENTAL MANAGER		

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*(Instructions on page 2)


RECEIVED

FEB 15 2007

Federal Approval of this
Action is Necessary

DIV. OF OIL, GAS & MINING

T10S, R16E, S.L.B.&M.

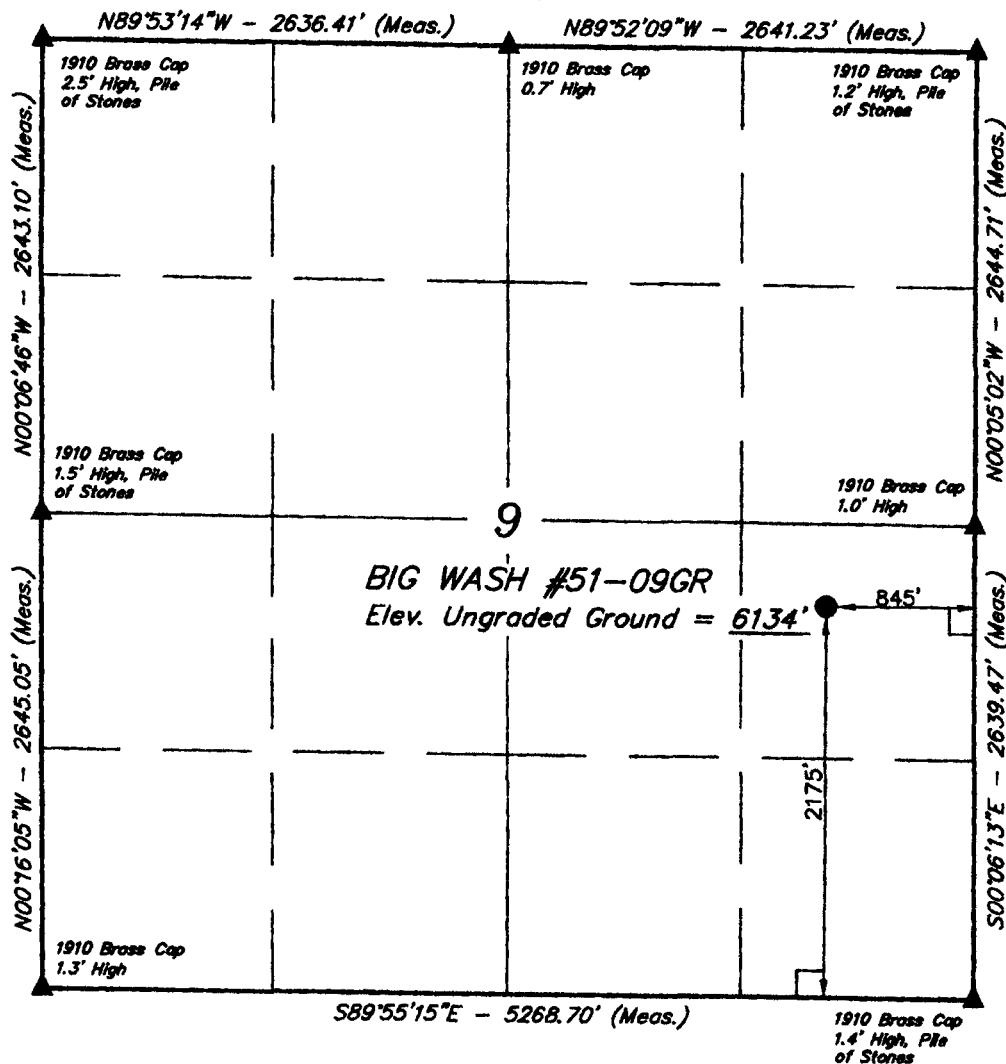

LEGEND:

- └ = 90° SYMBOL
- = PROPOSED WELL HEAD.
- ▲ = SECTION CORNERS LOCATED.

(AUTONOMOUS NAD 83)
 LATITUDE = 39°57'25.58" (39.957106)
 LONGITUDE = 110°07'04.43" (110.117897)
 (AUTONOMOUS NAD 27)
 LATITUDE = 39°57'25.71" (39.957142)
 LONGITUDE = 110°07'01.88" (110.117189)

EOG RESOURCES, INC.


Well location, BIG WASH #51-09GR, located as shown in the NE 1/4 SE 1/4 of Section 9, T10S, R16E, S.L.B.&M., Duchesne County, Utah.

BASIS OF ELEVATION

SPOT ELEVATION AT THE NORTHWEST CORNER OF SECTION 3, T11S, R17E, S.L.B.&M. TAKEN FROM THE WILKIN RIDGE QUADRANGLE, UTAH, DUCHESNE COUNTY, 7.5 MINUTE QUAD. (TOPOGRAPHIC MAP) PUBLISHED BY THE UNITED STATES DEPARTMENT OF THE INTERIOR, GEOLOGICAL SURVEY. SAID ELEVATION IS MARKED AS BEING 7047 FEET.


BASIS OF BEARINGS

BASIS OF BEARINGS IS A G.P.S. OBSERVATION.

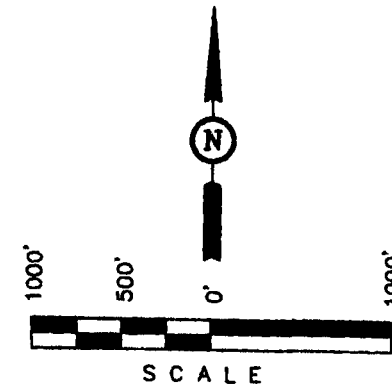

CERTIFICATE

THIS IS TO CERTIFY THAT THE SURVEY PLAT WAS PREPARED FROM FIELD NOTES OF ACTUAL SURVEY MADE BY ME UNDER MY SUPERVISION AND THAT THE SAME ARE TRUE AND CORRECT TO THE BEST OF MY KNOWLEDGE AND BELIEF.



REVISED: 12-01-06

UINTAH ENGINEERING & LAND SURVEYING
 86 SOUTH 200 EAST - VERNAL, UTAH 84078
 (435) 789-1017

SCALE 1" = 1000'	DATE SURVEYED: 10-25-06	DATE DRAWN: 10-26-06
PARTY T.A. E.D. S.L.	REFERENCES G.L.O. PLAT	
WEATHER COLD	FILE EOG RESOURCES, INC.	

EIGHT POINT PLAN

BIG WASH 51-09GR
NE/SE, SEC. 9, T10S, R16E, S.L.B.&M.
DUCHESNE COUNTY, UTAH

1. & 2. ESTIMATED TOPS & ANTICIPATED OIL, GAS, & WATER ZONES:

FORMATION	TVD-RKB (ft)	Objective	Lithology	
Uinta FM	18			
Green River FM	968			
Mahogany Oil Shale Bed	2,168			Oil
Garden Gulch MBR	2,918	Secondary		Oil / Gas
Middle Carb Bed	3,108			
Douglas Creek MBR	3,833	Primary		Oil / Gas
Castle Peak MBR	4,703	Secondary		Oil / Gas
Uteland Butte MBR	5,158	Secondary		Oil / Gas
Wasatch	5,348			
TD	5,450			

EST. TD: 5,450' or 200' ± below Wasatch Top**Anticipated BHP: 2,692 Psig**

- Fresh Waters may exist in the upper, approximately 1,000 ft ± of the Green River Formation, with top at about 2,000 ft ±.
- Cement isolation is installed to surface of the well isolating all zones by cement.

3. PRESSURE CONTROL EQUIPMENT: Production Hole - 5,000 Psig
 BOP Schematic Diagram attached.

4. CASING PROGRAM:

CASING	Hole Size	Length	Size	WEIGHT	Grade	Thread	Rating Collapse	Factor Burst	Tensile
Conductor	17 1/2"	0 – 45'	13 3/8"	48.0#	H-40	STC	770 PSI	1730 PSI	322,000#
Surface	12 1/4"	Surface– 500' KB±	9-5/8"	36.0#	J-55	STC	2020 PSI	3520 Psi	394,000#
Production	7-7/8"	Surface – TD	4-1/2"	11.6#	J-55	LTC	4960 PSI	5350 Psi	162,000#

All casing will be new or inspected.

EIGHT POINT PLAN

BIG WASH 51-09GR
NE/SE, SEC. 9, T10S, R16E, S.L.B.&M.
DUCHESNE COUNTY, UTAH

5. Float Equipment:

Surface Hole Procedure (0 - 500' ± Below GL):

Guide Shoe

Insert Float Collar (PDC drillable)

Centralizers: 1 – 5-10' above shoe, every collar for next 3 joints (4 total).

Production Hole Procedure (500' ± - TD):

Float shoe, 1 joint casing, float collar and balance of casing to surface. 4-1/2", 11.6#, J-55 or equivalent marker collars or short casing joints to be placed 400' above top of Garden Gulch. Centralizers to be placed 5' above shoe on joint #1, top of joint #2, and every 2nd joint to 400' above Garden Gulch top. (15± total). Thread lock float shoe, top and bottom of float collar, and top of 2nd joint.

6. MUD PROGRAM:

Surface Hole Procedure (0 - 500' ± below GL):

Air/air mist or aerated water

Production Hole Procedure (500' ± - TD):

Anticipated mud weight 9.0 – 9.5 ppg depending on actual wellbore condition encountered while drilling.

500'± - TD A closed mud system will be utilized. A bentonite gelled water mud system will be used to control viscosity w/PHPA polymer used for supplemental viscosity and clay encapsulation/inhibition. Water loss will be maintained at <15cc's using white starch or PAC. Bactericides will be used as needed. Anticipated pH will range from 9.0-10.0. Mud weight will be adjusted as necessary for well control. Defloculants/thinners will be used as necessary to maintain mud quality. LCM sweeps will be utilized as necessary to control lost circulation and mud loss. CO2 contamination, if encountered, will be treated with lime and gypsum.

7. VARIANCE REQUESTS:

Reference: Onshore Oil and Gas Order No. 2 – Item E: Special Drilling Operations

EOG Resources, Inc. requests a variance to regulations requiring the blooie line to be 100' in length. Due to reduce location excavation, the blooie line will be approximately 75' in length

EIGHT POINT PLAN

BIG WASH 51-09GR
NE/SE, SEC. 9, T10S, R16E, S.L.B.&M.
DUCHESNE COUNTY, UTAH

8. EVALUATION PROGRAM:

Logs: Mud log from base of surface casing to TD.

Open Hole Logs: Open Hole Logs will be run consisting of the following:
Schlumberger Platform Express: Open Hole Gamma Ray, Resistivity, and Neutron Porosity

9. CEMENT PROGRAM:

Surface Hole Procedure (0-500' ± Below GL)

Lead: 185 sks Class 'G' cement with 2% S1 (CaCl₂) & 0.25 pps D29 (cellophane flakes), mixed at 15.8 ppg, 1.16 ft³/sk., 4.95 gps water.

Top Out: 207 sks Top out with Class 'G' cement with 2% S1 (CaCl₂) in mix water, 15.8 ppg, 1.16 ft³/sk., 4.95 gps via 1" tubing set at 25' if needed.

Install 6' x 4' cellar ring, drill rat and mouse holes with spud rig.

Note: **Cement volumes will be calculated to bring cement to surface.**

Production Hole Procedure (500' ± to TD)

Lead: 110 sks: 35:65 Poz "G" w/4% D20 (Bentonite), 2% D174 (Extender), 0.2% D65 (Dispersant), 0.2% D46 (Antifoam), 0.75% D112 (Fluid Loss Additive), 0.200% D13 (Retarder), 0.25 pps D29 (cello flakes) mixed at 13.0 ppg, 1.75 ft³/sk., 9.19 gps water.

Tail: 640 sks: 50:50 Poz "G" w/ 2% D20 (Bentonite), 0.1% D46 (Antifoam), 0.075% D13 (Retarder), 0.2% D167 (Fluid Loss Additive), 0.2% D65 (Dispersant), mixed at 14.1 ppg, 1.28 ft³/sk., 5.9 gps water.

Note: The above number of sacks is based on gauge-hole calculation.
Lead volume to be calculated to bring cement to 200'± above 9-5/8" casing shoe.
Tail volume to be calculated to bring cement to 400'± above top of Garden Gulch MBR.
Final Cement volumes will be based upon gauge-hole plus 45% excess.

EIGHT POINT PLAN

BIG WASH 51-09GR
NE/SE, SEC. 9, T10S, R16E, S.L.B.&M.
DUCHESNE COUNTY, UTAH

10. ABNORMAL CONDITIONS:

Surface Hole (Surface - 500'±):

Lost circulation

Production Hole (500'± - TD):

Sloughing shales, lost circulation and key seat development are possible in the Garden Gulch Formation.

11. STANDARD REQUIRED EQUIPMENT:

- A. Choke Manifold
- B. Upper and Lower Kelly Cock
- C. Stabbing Valve
- D. Visual Mud Monitoring


12. HAZARDOUS CHEMICALS:

No chemicals subject to reporting under SARA title III in an amount equal to or greater than 10,000 pounds will be used, produced, stored, transported, or disposed of annually in association with the drilling of this well. Furthermore, no extremely hazardous substances, as defined in 40 CFR 355, in threshold planning quantities, will be used, produced, stored, transported, or disposed of in association with the drilling of this well.

(Attachment: BOP Schematic Diagram)


**EOG RESOURCES 11" 5,000 PSI W.P. BOP
CONFIGURATION**

PAGE 1 OF 2

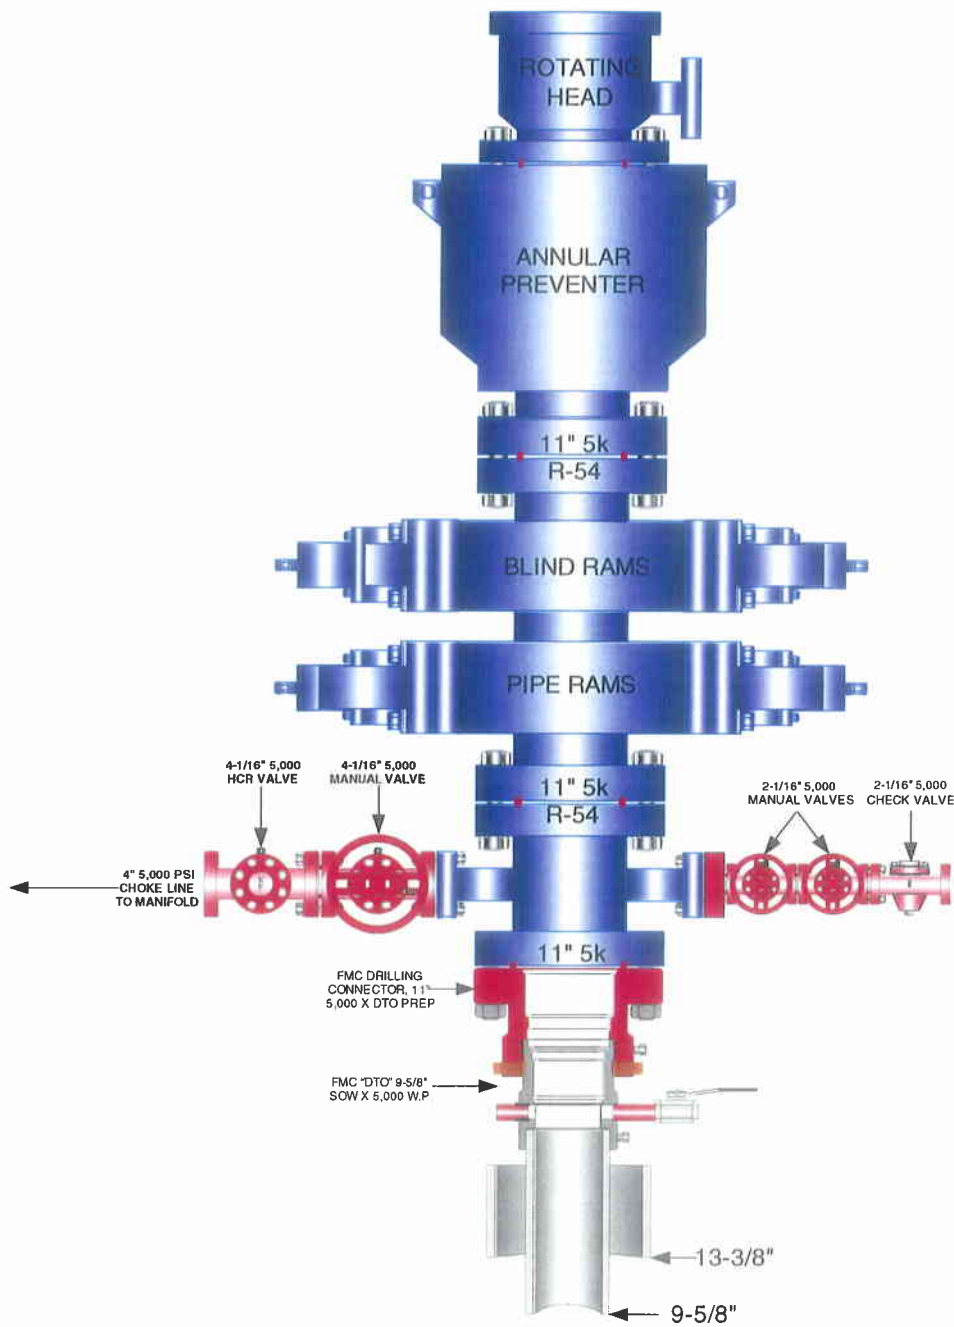

EOG RESOURCES CHOKE MANIFOLD CONFIGURATION W/ 5,000 PSI WP VALVES

PAGE 2 OF 2

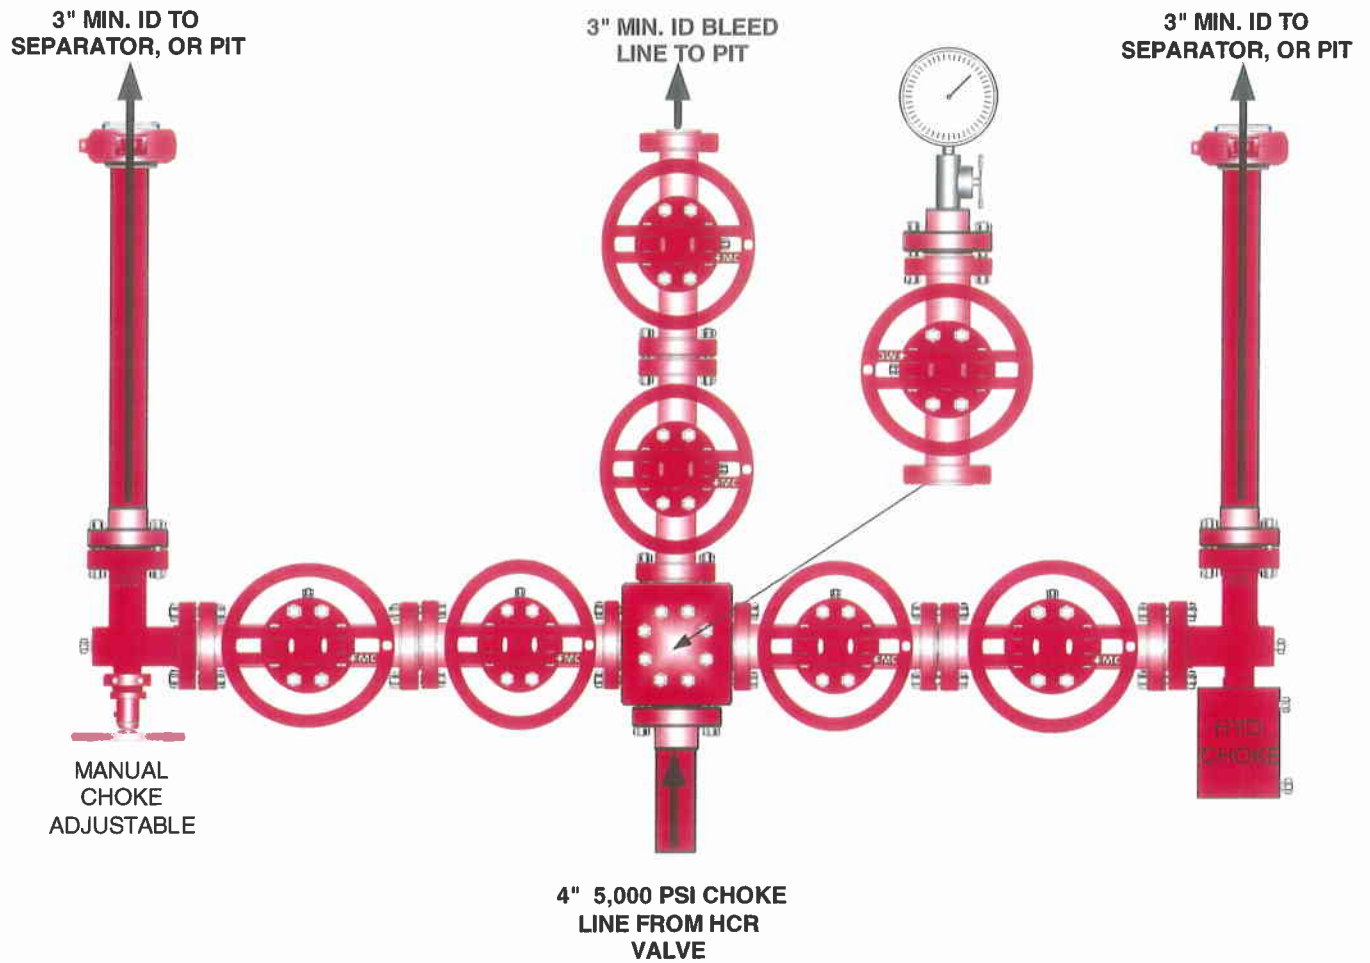

Testing Procedure:

1. BOP will be tested with a professional tester to conform to Onshore Order #2.
2. Blind and Pipe rams will be tested to rated working pressure, 5,000 psi.
3. Annular Preventer will be tested to 50% working pressure, 2,500 psi.
Casing will be tested to 0.22 psi / ft. or 1,500 psi. Not to exceed 70% of burst strength, **whichever is greater.**
4. All lines subject to well pressure will be tested to the same pressure as blind and pipe rams.
5. All BOPE specifications and configurations will meet Onshore Order #2 requirements.



***BIG WASH 51-09GR
NE/SE, Section 9, T10S, R16E
Duchesne County, Utah***

SURFACE USE PLAN

NOTIFICATION REQUIREMENTS

- | | |
|----------------------------------|--|
| Location Construction: | Forty-eight (48) hours prior to construction of location and access roads. |
| Location Completion: | Prior to moving on the drilling rig. |
| Spud Notice: | At least twenty-four (24) hours prior to spudding the well. |
| Casing String and Cementing: | Twenty-four (24) hours prior to running casing and cementing all casing strings. |
| BOP and related Equipment Tests: | Twenty-four (24) hours prior to running casing and tests. |
| First Production Notice: | Within five (5) business days after new well begins or production resumes after well has been off production for more than ninety (90) days. |

The well pad is approximately 275 feet long with a 204-foot width, containing 1.29 acres more or less. The well access road is approximately 250 feet long with a 30-foot right-of-way, disturbing approximately 0.17 acre. New surface disturbance associated with access road and the well pad is estimated to be approximately 1.46 acres.

The pipeline is approximately 215 feet long with a 40 foot right-of-way, within Federal Lease UTU 82698, disturbing approximately .20 acre more or less. The pipeline ties into a proposed pipeline for the Gilsonite Draw 5-03GR (a pipeline right-of-way will be submitted with the APD), proceeding for approximately 29,654 feet, tying into an existing pipeline in the SWSW of Section 25, T10S, R15E. No off-lease right-of-way will be required.

1. EXISTING ROADS:

- A. See attached Wellsite Plats showing directional reference stakes on location, and attached TOPO Map "B" showing access to location from existing roads.
- B. The proposed well site is located approximately 21.6 miles south of Myton, Utah – See attached TOPO Map "A".
- C. Refer to attached Topographic Map "A" showing labeled access route to location.
- D. Existing roads will be maintained and repaired as necessary.

2. PLANNED ACCESS ROAD:

- A. The access road will be approximately 250' in length.
- B. The access road has a 30-foot ROW w/18 foot running surface.
- C. Maximum grade of the new access road will be 8 percent.
- D. No turnouts will be required.
- E. Road drainage crossings shall be of the typical dry creek drainage crossing type.
- F. No bridges, or major cuts and fills will be required.
- G. The access road will be dirt surface.
- H. No gates, cattleguards, or fences will be required or encountered.

New or reconstructed roads will be centerlined – flagged at time of location staking.

Road drainage crossings shall be of the typical dry creek drainage crossing type. Crossings shall be designed so they will not cause siltation or accumulation or debris in the drainage crossings nor shall the drainages be blocked by the roadbed. Erosion of drainage ditches by run off water shall be prevented by diverting water off at frequent intervals by means of

cutouts. Upgrading shall not be allowed during muddy conditions. Should mud holes develop, they shall be filled in and detours around them avoided.

As operator, EOG Resources, Inc. shall be responsible for all maintenance on cattleguards, or gates associated with this oil and/or gas operation.

Traveling off the 30-foot right-of-way will not be allowed. The access road and associated drainage structures will be constructed and maintained in accordance with road guidelines contained in the joint BLM/USFS publication: Surface Operating Standards for Oil and Gas Exploration and Development, Third Edition, and/or BLM Manual Section 9113 concerning road construction standards on projects subject to federal jurisdiction. During the drilling and production phase of operations, the road surface and shoulders will be kept in a safe and useable condition and drainage ditches and culverts will be kept clear and free flowing.

3. LOCATION OF EXISTING WELLS WITHIN A ONE-MILE RADIUS:

See attached TOPO map "C" for the location of wells within a one-mile radius.

4. LOCATION OF EXISTING AND/OR PROPOSED PRODUCTION FACILITIES:

A. On Well Pad

1. Production facilities will be set on location if the well is successfully completed for production. Facilities will consist of wellhead valves, combo separator-dehy unit with meter, two (2) 400 BBL vertical tanks and/or one (1) 300 BBL vertical tank and attaching piping.
2. Gas gathering lines – A 4" gathering line will be buried from dehy to the edge of the location.

B. Off Well Pad

1. Proposed location of attendant off pad flowlines shall be flagged prior to archaeological clearance.
2. The length of the new proposed pipeline is 215' x 40'. The proposed pipeline leaves the western edge of the well pad (Lease UTU 82698) proceeding in a westerly direction for an approximate distance of 215' tying into a proposed pipeline for the Gilsonite Draw 5-03GR, proceeding in a southwesterly direction for approximately 29,654 feet, tying into an existing pipeline in the SWSW of Section 25, T10S, R15E. Pipe will be 4" NOM, 0.156 wall, Grade X42, Zap-Lok, electric weld with a 35 mil X-Tru coating.
3. Proposed pipeline will be a 4" OD steel, welded line laid on the surface
4. Protective measures and devices for livestock and wildlife will be taken and /or installed where required.

If storage facilities/tank batteries are constructed on this lease, the facility/battery or the well pad shall be surrounded by a containment dike of sufficient capacity to contain, at a minimum, the entire contents of the largest tank within the facility/battery, unless more stringent protective requirements are deemed necessary by the authorized officer.

All permanent (on site for six months or longer) structures constructed or installed (including pumping units) will be painted a flat, non-reflective, earthtone color to match one of the standard environmental colors, as determined by the Rocky Mountain Five State Interagency Committee. All facilities will be painted within 6 months of installation. **The production facilities and tanks shall be painted olive black.** Facilities required to comply with O.S.H.A. (Occupational Safety and Health Act) will be excluded.

5. LOCATION AND TYPE OF WATER SUPPLY:

- A. Water supply will be from Ouray Municipal Water Plant at Ouray, Utah, and/ or Target Trucking Inc.'s water source in the SW/SW. Sec 35, T9S, R22E Uintah County, Utah (State Water Right # 49-1501, and/or Myton City water source (Duchesne Valley Treatment Plant) located at 500 West 100 North Myton, Utah (State Water Right # 07002).
- B. Water will be hauled by a licensed trucking company.
- C. No water well will be drilled on lease.

6. SOURCE OF CONSTRUCTION MATERIALS:

- A. All construction material for this location and access road will be of native borrow and soil accumulated during the construction of the location.
- B. No mineral materials will be required.

7. METHODS OF HANDLING WASTE DISPOSAL:

A. METHODS AND LOCATION

- 1. Cuttings will be confined in the reserve pit.
- 2. A portable toilet will be provided for human waste during the drilling and completion of the well. Disposal will be at the Vernal and/or Roosevelt sewage disposal plant.
- 3. Burning will not be allowed. Trash and other waste material will be contained in a wire mesh cage and disposed of at the Uintah and/or Duchesene County Landfill.
- 4. Produced wastewater will be confined to a lined pit or storage tank for a period not to exceed 90 days after initial production. After the 90 day period, the produced water will be contained in a tank on location and then disposed of at one of the following locations: Ace Disposal, Brennan Bottoms or EOG

Resources, Inc. drilling operations (Chapita Wells Unit, Natural Buttes Unit & Stagecoach Unit).

5. All chemicals will be disposed of at an authorized disposal site. Drip pans and absorbent pads will be used on the drilling rig to avoid leakage of oil to the pit.
- B. Water from drilling fluids and recovered during testing operations will be disposed of by either evaporating in the reserve pit or by removed and disposed of at an authorized disposal site. Introduction of well bore hydrocarbons to the reserve pit will be avoided by flaring them off in the flare pit at the time of recovery.

The reserve pit will be constructed so as not to leak, break, or allow discharge. If the reserve pit requires padding prior to lining (due to rocky conditions) felt padding will be used.

The reserve pit shall be lined with felt and a 16-millimeter plastic liner.

EOG Resources, Inc. maintains a file, per 29 CFR 1910.1200 (g) containing current Material Safety Data Sheets (MSDS) for all chemicals, compounds, and/or substances which are used during the course of construction, drilling, completion, and production operations for this project. Hazardous materials (substances) which may be found at the site may include drilling mud and cementing products which are primarily inhalation hazards, fuels (flammable and/or combustible), materials that may be necessary for well completion/ stimulation activities such as flammable or combustible substances and acids/gels (corrosives). The opportunity for Superfund Amendments and Reauthorization Act (SARA) listed Extremely Hazardous Substances (EHS) at the site is generally limited to proprietary treating chemicals. All hazardous and EHS and commercial preparations will be handled in an appropriate manner to minimize the potential for leaks or spills to the environment.

8. ANCILLARY FACILITIES:

None anticipated.

9. WELL SITE LAYOUT:

- A. Refer to attached well site plat for related topography cuts and fills and cross sections.
- B. Refer to attached well site plat for rig layout and soil material stockpile location as approved on On-site.
- C. Refer to attached well site plat for rig orientation, parking areas, and access road.

The reserve pit will be located on the Northeast corner of the location. The flare pit will be located downwind of the prevailing wind direction on the west side of the location, a minimum of 100 feet from the well head and 30 feet from the reserve pit fence.

The stockpiled pit topsoil will be stored separate from the location topsoil between Corners #4 and #5. The stockpiled location topsoil will be stored between Corners #8 and #2. Upon completion of construction, the stockpiled topsoil from the location will be broadcast seeded with the approved seed mixture from this location and then walked down with a Caterpillar tractor.

Access to the well pad will be from the North.

FENCING REQUIREMENTS:

All pits will be fenced according to the following minimum standards:

- A. Thirty-nine inch net wire shall be used with at least one strand of barbed wire on top of the net wire. (Barbed wire is not necessary if pipe or some type of reinforcement rod is attached to the top of the entire fence.)
- B. The net wire shall be no more than 2 inches above the ground. The barbed wire strand shall be 3 inches above the net wire. Total height of the fence shall be at least 42 inches.
- C. Corner posts shall be cemented and/or braced in such a manner as to keep the fence tight at all times.
- D. Standard steel, wood, or pipe posts shall be used between the corner braces. Maximum distances between any two posts shall be no greater than 16 feet.
- E. All wire shall be stretched by using a stretching device before it is attached to the corner posts.

The reserve pit fencing will be on the three sides during drilling operations and on the fourth side when the rig moves off location. Pits will be fenced and maintained until clean-up.

Each existing fence to be crossed by the access road shall be braced and tied off before cutting so as to prevent slacking of the wire. The opening shall be closed temporarily as necessary during construction to prevent the escape of livestock, and, upon completion of construction, the fence shall be repaired to BLM or SMA specifications. A cattleguard with an adjacent 16 foot gate shall be installed in any fence where a road is regularly traveled. If the well is a producer, the cattleguards (shall/shall not) be permanently counted on concrete bases. Prior to crossing any fence located on Federal land, or any fence between Federal land and private land, the operator will contact the BLM, who will in turn contact the grazing permittee or owner of said fence and offer him/her the opportunity to be present when the fence is cut in order to satisfy himself/herself that the fence is adequately braced and tied off.

10. PLANS FOR RECLAMATION OF THE SURFACE:

A. Producing Location

Immediately upon well completion, the location and surrounding area will be cleared of all unused tubing, equipment, debris, materials, trash, and junk not required for production.

Immediately upon well completion, any hydrocarbons on the pit shall be removed in accordance with CFR 3162.7-1.

If a plastic nylon reinforced liner is used, it shall be torn and perforated before backfilling of the reserve pit.

The reserve pit and that portion of the location not needed for production facilities/operations will be recontoured to the approximate natural contours. The stockpiled pit topsoil will then be spread over the pit area and broadcast seeded with the prescribed seed mixture for this location. The seeded area will then be walked down with a cat.

Seed Mixture	Drilled Rate (lbs./acre PLS*)
Crested Wheatgrass	6.0
Needle and Threadgrass	6.0

*Pure live seed (PLS) formula: percent of purity of seed mixture times percent germination of seed mixture equals portion of seed mixture that is PLS.

B. Dry Hole/Abandoned Location

At such time as the well is plugged and abandoned, the operator will submit a subsequent report of abandonment and the BLM will attach the appropriated surface rehabilitation conditions of approval.

Seed Mixture	Drilled Rate (lbs./acre PLS*)
Wyoming Big Sagebrush	3.0
Fourwing Saltbush	4.0
Indian Ricegrass	4.0
Crested Wheatgrass	1.0

*Pure live seed (PLS) formula: percent of purity of seed mixture times percent germination of seed mixture equals portion of seed mixture that is PLS.

11. SURFACE OWNERSHIP:

Surface ownership of the proposed well site, access road, and pipeline route is as follows:

Bureau of Land Management

12. OTHER INFORMATION:

A. EOG Resources, Inc. will inform all persons in the area who are associated with this project that they are subject to prosecution for knowingly disturbing historic or archaeological sites, or for collecting artifacts. If historic or archaeological materials are uncovered during construction, the operator will immediately stop work that might further disturb such materials, and contact the Authorized Officer. Within five working days the Authorized Officer will inform the operator as to:

- Whether the materials appear eligible for the National Register of Historic Places;
- The mitigation measures the operator will likely have to undertake before the site can be used.
- A time frame for the Authorized Officer to complete an expedited review under 36 CFR 800.11 to confirm, through the State Historic Preservation Officer, that the findings of the Authorized Officer are correct and that mitigation is appropriate.

If the operator wished, at any time, to relocate activities to avoid the expense of mitigation and/or the delays associated with this process, the Authorized Officer will assume responsibility for whatever recordation and stabilization of the exposed materials that may be required. Otherwise, the operator will be responsible for mitigation costs. The Authorized Officer will provide technical and procedural guidelines for the conduct of mitigation. Upon verification from the Authorized Officer that required mitigation has been completed, the operator will then be allowed to resume construction.

- B. As operator, EOG Resources, Inc. will control noxious weeds along Right-of-Ways for roads, pipelines, well sites, or other applicable facilities. A list of noxious weeds will be obtained from the BLM administered land, a Pesticide Use proposal shall be submitted, and given approval, prior to the application of herbicides or other pesticides or possible hazardous chemicals.
- C. The drilling rig and ancillary equipment will be removed from the location prior to commencement of completion operations. Completion operations will be conducted utilizing a completion/workover rig.
- D. Drilling rigs and/or equipment used during drilling operations on this well site will not be stacked or stored on BLM lands after the conclusion of drilling operations or at any other time without BLM authorization. However, if BLM authorization is obtained, it is only a temporary measure to allow time to make arrangements for permanent storage

on commercial facilities. (The BLM does not seek to compete with private industry. There are commercial facilities available for stacking and storing drilling rigs.)

All lease and/or unit operations will be conducted in such a manner that full compliance is made with all applicable laws, regulations, Onshore Oil and Gas Orders, the approved Plan of Operations, and any applicable Notice of Lessees. The operator is fully responsible for the actions of its subcontractors. A complete copy of the approved "Application for Permit to Drill" will be furnished to the field representative(s) to ensure compliance and shall be on location during all construction and drilling operations.

Construction activity will not be conducted using frozen or saturated soils material or during periods when watershed damage is likely to occur.

If the existing access road, proposed access road, and proposed pad are dry during construction, drilling, and completion activities, water will be applied to help facilitate compaction during construction and to minimize soil loss as a result of wind erosion.

A cultural resources survey was conducted and submitted on December 20, 2006 by Montgomery Archaeological Consultants. A paleontology survey was conducted and will be submitted.

Additional Surface Stipulations:

No construction or drilling activities shall be conducted between November 1st through April 30th due to crucial deer and elk wintering.

LESSEE OR OPERATOR'S REPRESENTATIVE AND CERTIFICATION:

PERMITTING AGENT

Mary A. Maestas
EOG Resources, Inc.
P.O. Box 1815
Vernal, Ut 84078
(435) 781-9111


DRILLING OPERATIONS

Donald Presenkowski
EOG Resources, Inc.
P.O. Box 250
Big Piney, WY 83113
307-276-4865

I hereby certify that I, or persons under my direct supervision, have inspected the proposed drill site and access route; that I am familiar with the conditions which currently exist; that the statements made in this plan are, to the best of my knowledge, true and correct; and that the work associated with the operations proposed herein will be performed by EOG Resources, Inc. and its contractors and subcontractors in conformity with this plan and the terms and conditions under which it is approved. This statement is subject to the provisions of 18 U.S.C. 1001 for the filing of a false statement.

Please be advised that EOG Resources, Inc. is considered to be the operator of the Big Wash 51-09GR Well, located in the NESE, of Section 9, T10S, R16E, Duchesne County, Utah; Federal land and minerals; and is responsible under the terms and conditions of the lease for the operations conducted upon the leased lands. Bond Coverage is under Bond # NM 2308.

February 14, 2007 _____
Date



Mary A. Maestas, Regulatory Assistant

EOG RESOURCES, INC.

BIG WASH #51-09GR

LOCATED IN DUCHESNE COUNTY, UTAH
SECTION 9, T10S, R16E, S1L.B.&M.

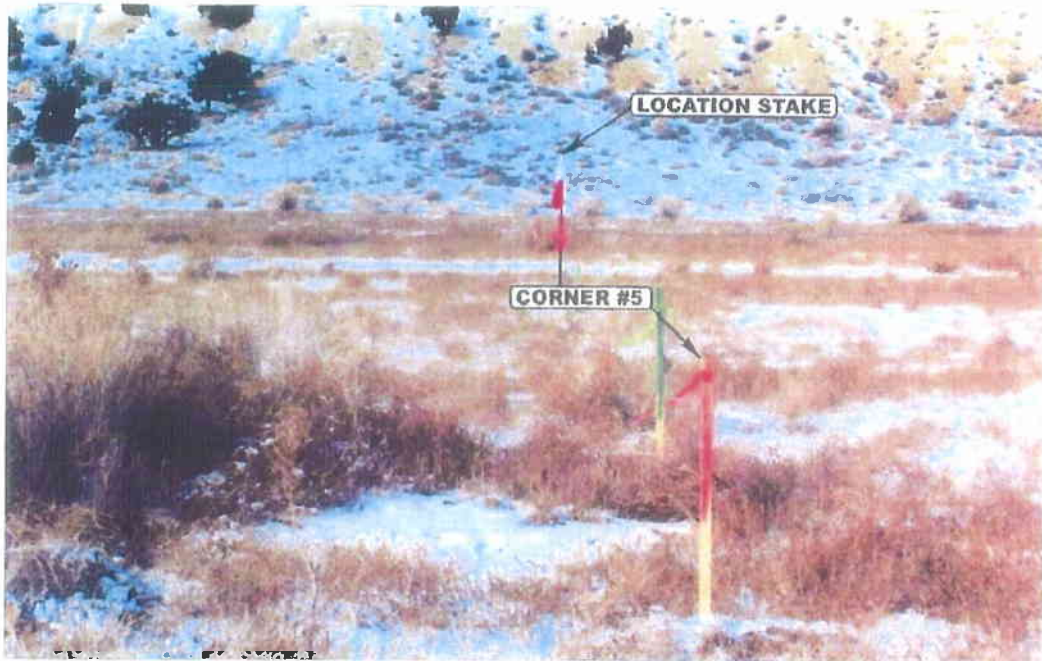


PHOTO: VIEW FROM CORNER #5 TO LOCATION STAKE

CAMERA ANGLE: NORTHWESTERLY



PHOTO: VIEW FROM BEGINNING OF PROPOSED ACCESS

CAMERA ANGLE: SOUTHWESTERLY



Since 1964

E&L Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
435-789-1017 uels@uelsine.com

LOCATION PHOTOS

10 30 06
MONTH DAY YEAR

PHOTO

TAKEN BY: T.A.

DRAWN BY: L.K.


REVISED: 12-01-06

EOG RESOURCES, INC.

LOCATION LAYOUT FOR

BIG WASH #51-09GR
SECTION 9, T10S, R16E, S.L.B.&M.
2175' FSL 845' FEL


FIGURE #1



CONSTRUCT
DIVERSION
DITCH

CONSTR
DIVERSI
DITCH

CONSTRUCT BERM



C-2.1'
El. 35.8'

C-1.9'
El. 35.6'

Approx.
Top of
Cut Slope

El. 35.9'

Sta. 2+75

Existing
Drainage



NOTE:
Flare Pit is to
be located a min.
of 100' from the
Well Head.

RESERVE PITS
(12' Deep)

Total Pit Capacity
W/2' of Freeboard
= 4,470 Bbls.±
Total Pit Volume
= 1,290 Cu. Yds

Reserve Pit Backfill
& Spoils Stockpile

C-0.6'
El. 34.3'

C-12.9'
El. 34.6'
(btm. pit)

C-0.5'
El. 34.2'

C-0.7'
El. 34.4'

C-0.4'
El. 34.1'

Sta. 1+50

CONSTRUCT
DIVERSION
DITCH

F-1.8'
El. 31.9'

Approx.
Toe of
Fill Slope

F-0.9'
El. 32.8'

F-1.6'
El. 32.1'

Sta. 0+00

Proposed Access
Road

Elev. Ungraded Ground at Location Stake = 6134.4'
Elev. Graded Ground at Location Stake = 6133.7'

UINTAH ENGINEERING & LAND SURVEYING
85 So. 200 East • Vernal, Utah 84078 • (435) 789-1077

EOG RESOURCES, INC.



TYPICAL CROSS SECTIONS FOR

BIG WASH #51-09GR
SECTION 9, T10S, R16E, S.L.B.&M.
2175' FSL 845' FEL

FIGURE #2

1" = 20'
X-Section
Scale
1" = 50'

DATE: 10-26-06
Drawn By: S.L.
REVISED: 12-01-06

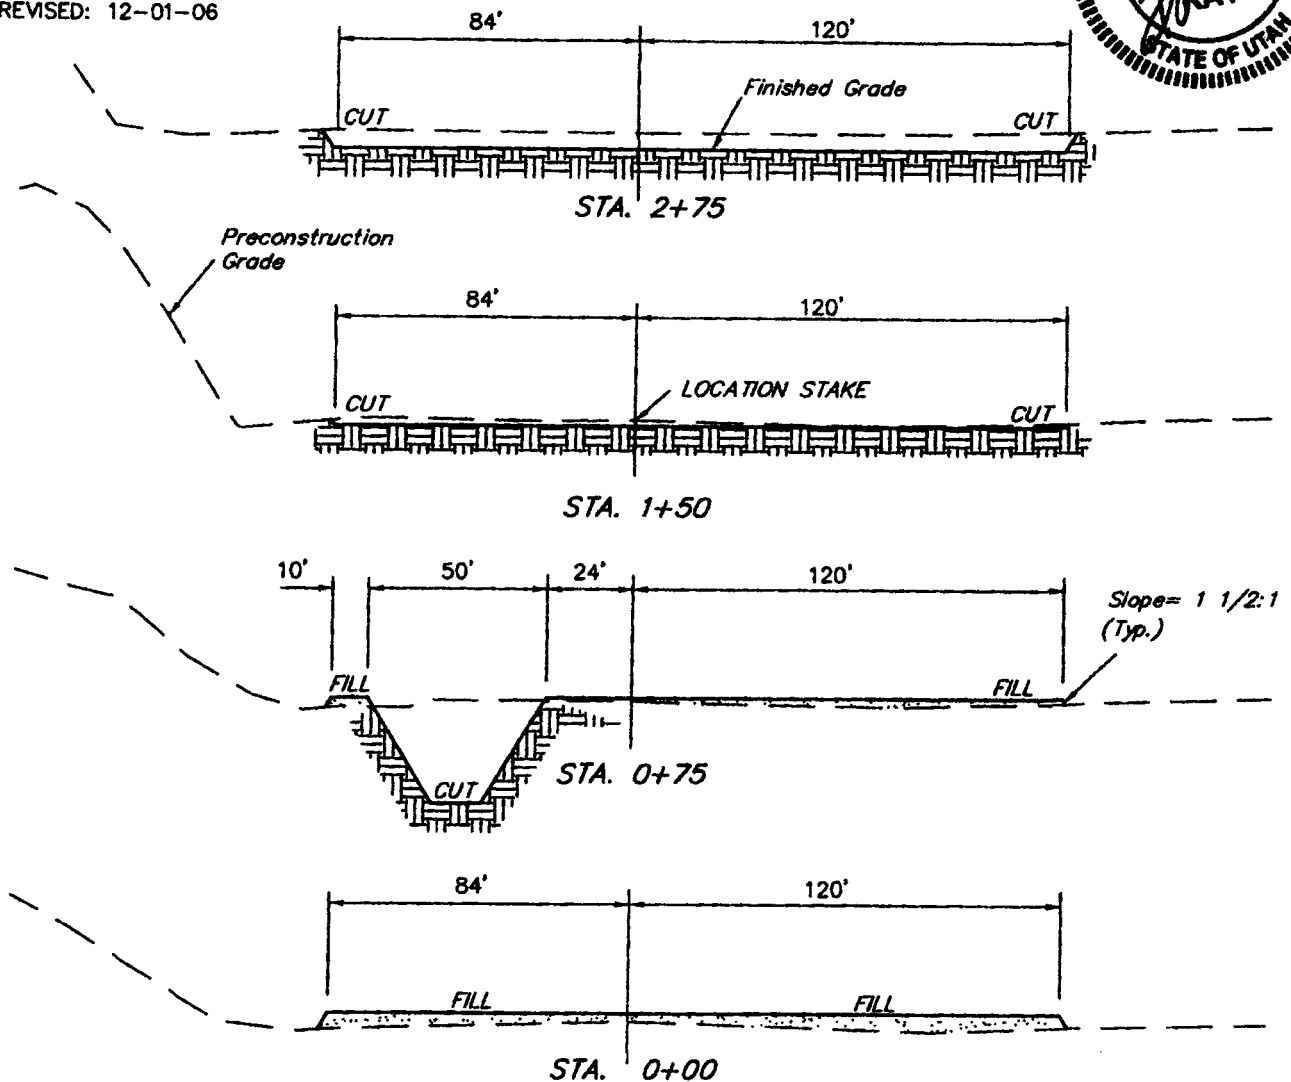

* NOTE:
FILL QUANTITY INCLUDES
5% FOR COMPACTION

APPROXIMATE YARDAGES

(6") Topsoil Stripping = 1,100 Cu. Yds.
Remaining Location = 1,830 Cu. Yds.

TOTAL CUT = 2,930 CU.YDS.
FILL = 1,180 CU.YDS.

NOTE:

Topsoil should not be
Stripped Below Finished
Grade on Substructure Area.

EXCESS MATERIAL = 1,750 Cu. Yds.
Topsoil & Pit Backfill = 1,750 Cu. Yds.
(1/2 Pit Vol.)
EXCESS UNBALANCE = 0 Cu. Yds.
(After Interim Rehabilitation)



UINTAH ENGINEERING & LAND SURVEYING
85 So. 200 East • Vernal, Utah 84078 • (435) 789-1017

EOG RESOURCES, INC.
PRODUCTION FACILITY LAYOUT FOR

BIG WASH #51-09GR
SECTION 9, T10S, R16E, S.L.B.&M.
2175' FSL 845' FEL




SCALE: 1" = 50'
DATE: 10-26-06
Drawn By: S.L.
REVISED: 12-01-06

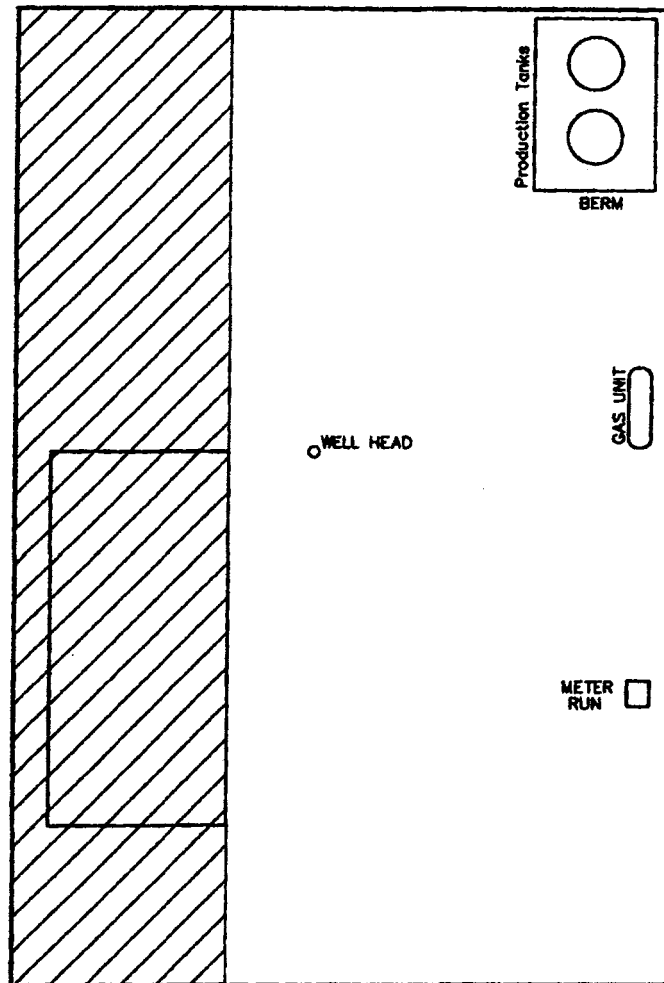

 RE-HABED AREA

UINTAH ENGINEERING & LAND SURVEYING
85 So. 200 East • Vernal, Utah 84078 • (435) 789-1017

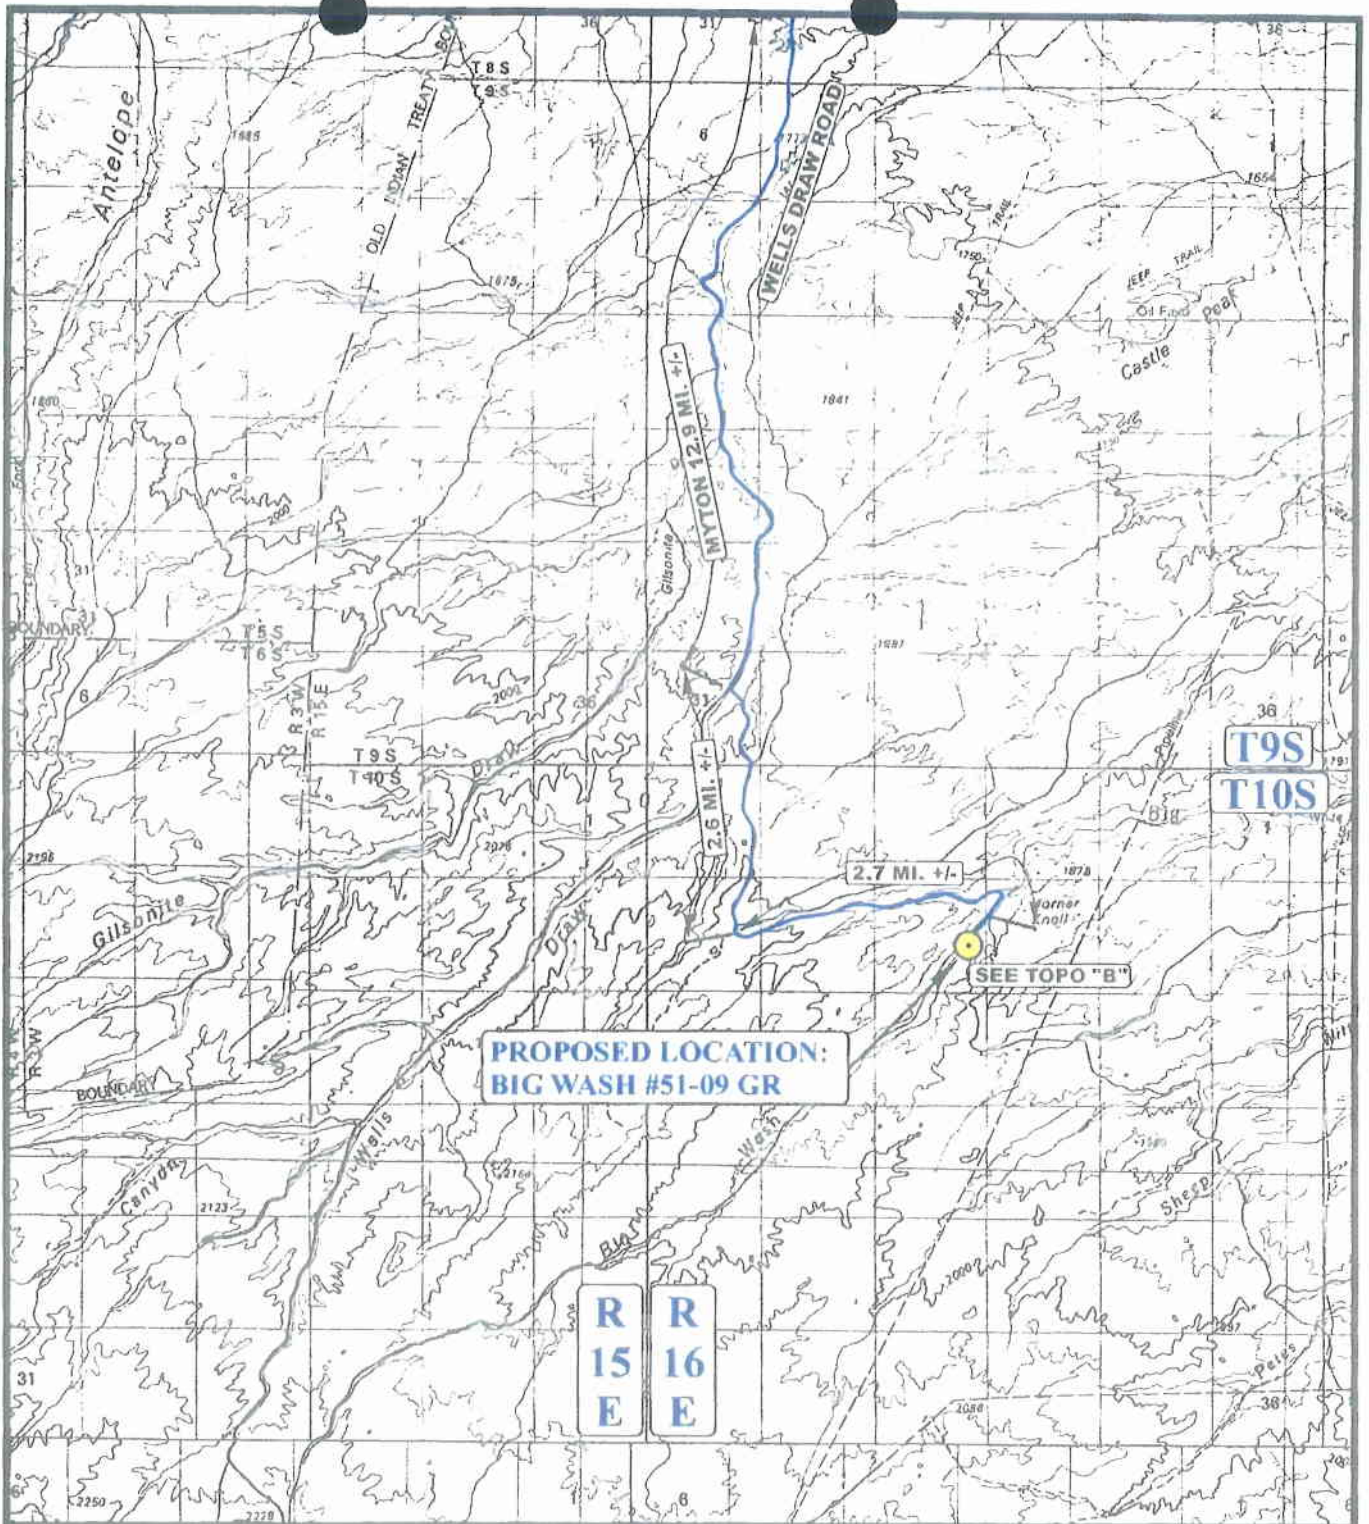

**PROPOSED LOCATION:
BIG WASH #51-09 GR**

**R 15 E
R 16 E**

**T9S
T10S**

LEGEND:

PROPOSED LOCATION

EOG RESOURCES, INC.

**BIG WASH #51-09GR
SECTION 9, T10S, R16E, S.L.B.&M.
2175' FSL 845' FEL**



Uintah Engineering & Land Surveying
85 South 200 East Vernal, Utah 84078
(435) 789-1017 * FAX (435) 789-1813




**TOPOGRAPHIC
MAP**

10 30 06
MONTH DAY YEAR

SCALE: 1:100,000 DRAWN BY: L.K. REVISED: 12-01-06



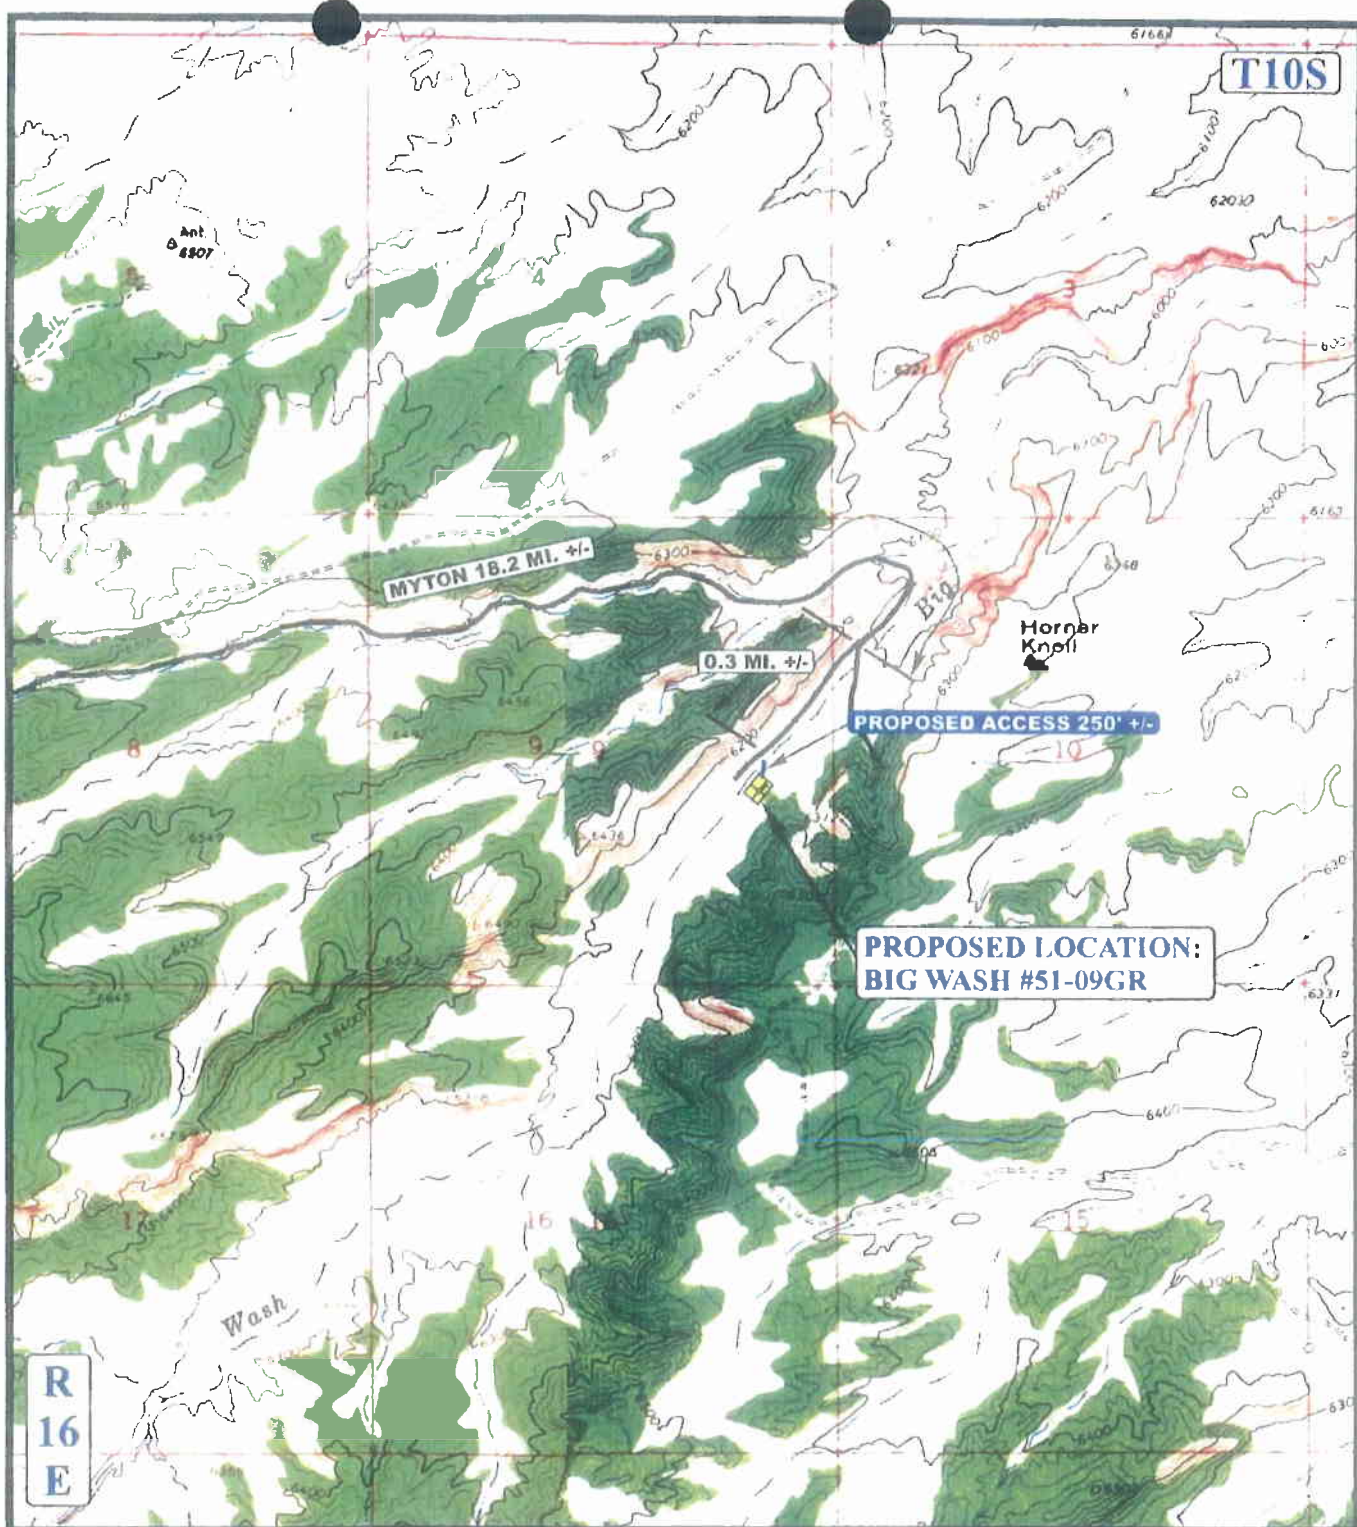

LEGEND:

— EXISTING ROAD
 - - - PROPOSED ACCESS ROAD

EOG RESOURCES, INC.

BIG WASH #51-09GR
SECTION 9, T10S, R16E, S.L.B.&M.
2175' FSL 845' FEL



Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813




TOPOGRAPHIC
MAP

10 30 06
 MONTH DAY YEAR

SCALE: 1" = 2000' DRAWN BY: L.K. REVISED: 12-01-06



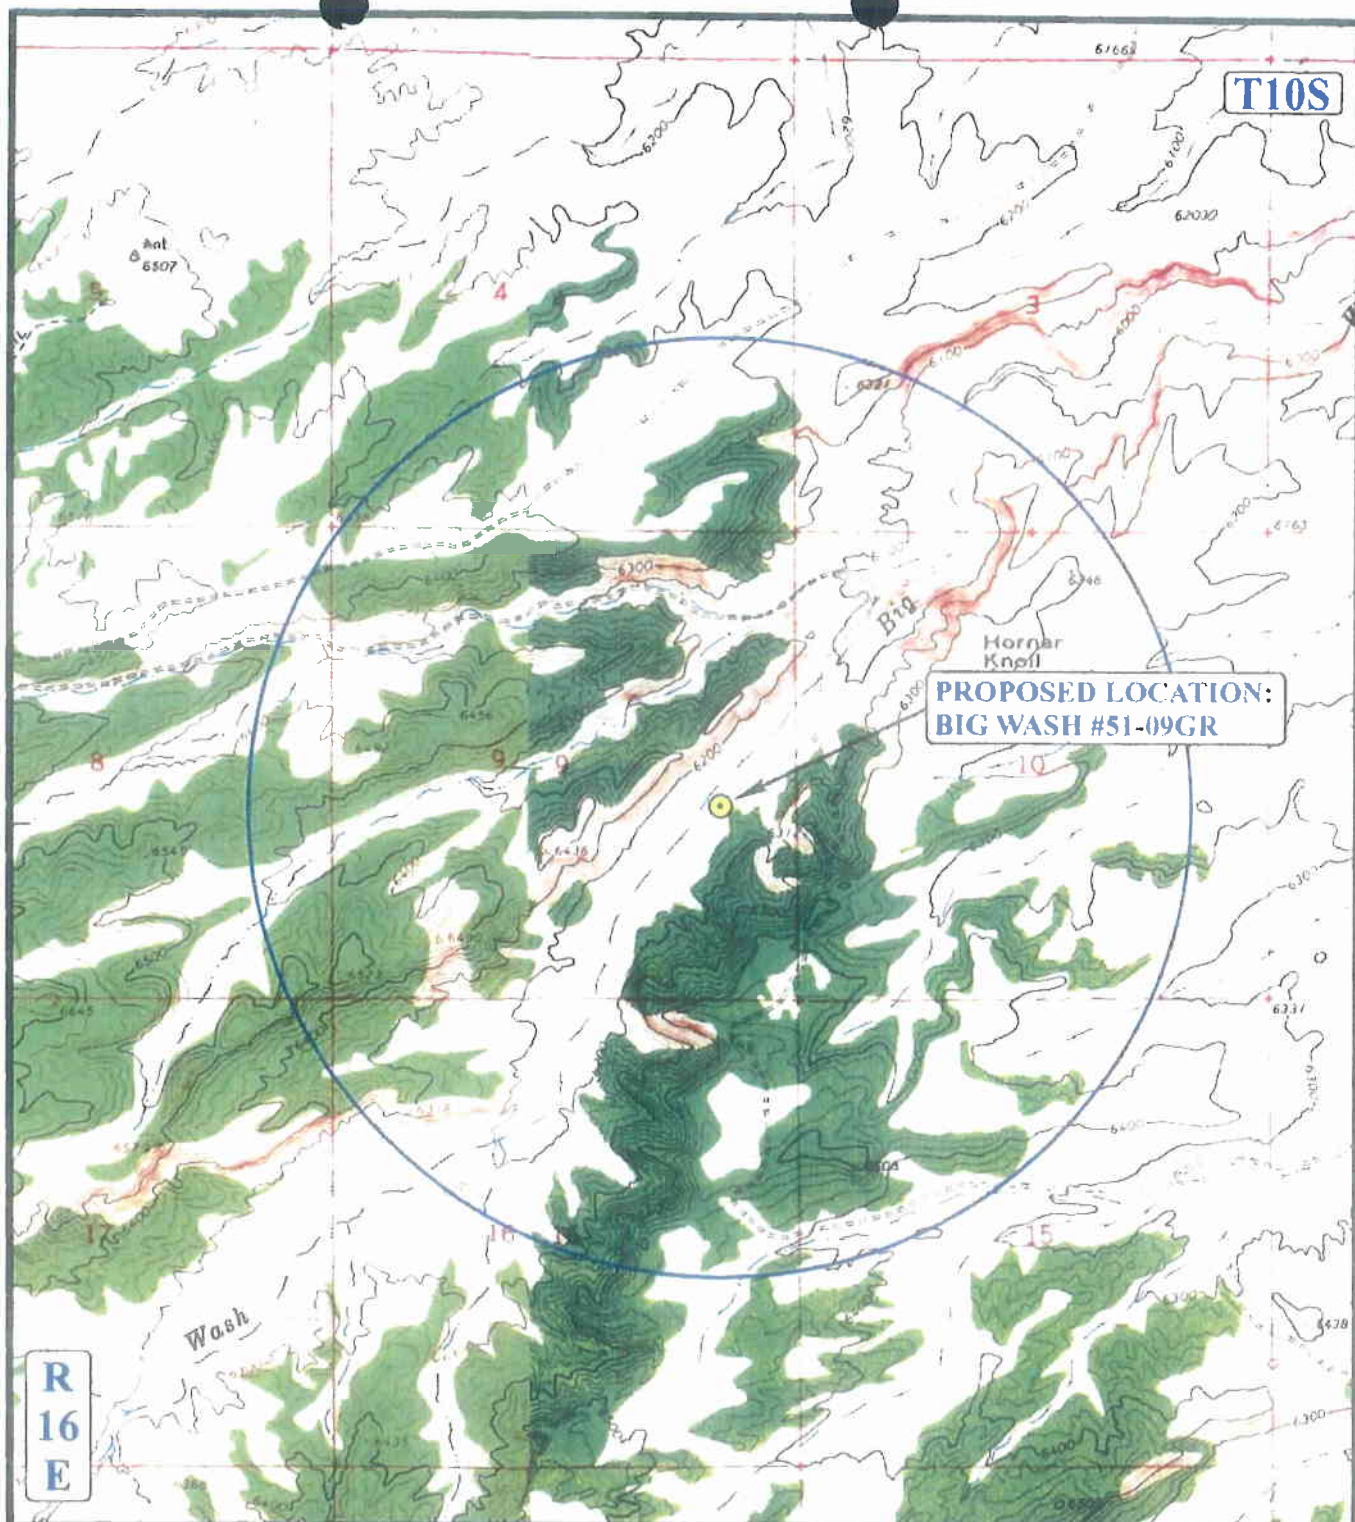

LEGEND:

- | | |
|-------------------|-------------------------|
| ⊗ DISPOSAL WELLS | ⊗ WATER WELLS |
| ● PRODUCING WELLS | ● ABANDONED WELLS |
| ● SHUT IN WELLS | ● TEMPORARILY ABANDONED |



Utah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813



EOG RESOURCES, INC.


BIG WASH #51-09GR
SECTION 9, T10S, R16E, S.L.B.&M.
2175' FSL 845' FEL

TOPOGRAPHIC
MAP

10 30 06
 MONTH DAY YEAR

SCALE: 1" = 2000' DRAWN BY: L.K. REVISED: 12-01-06



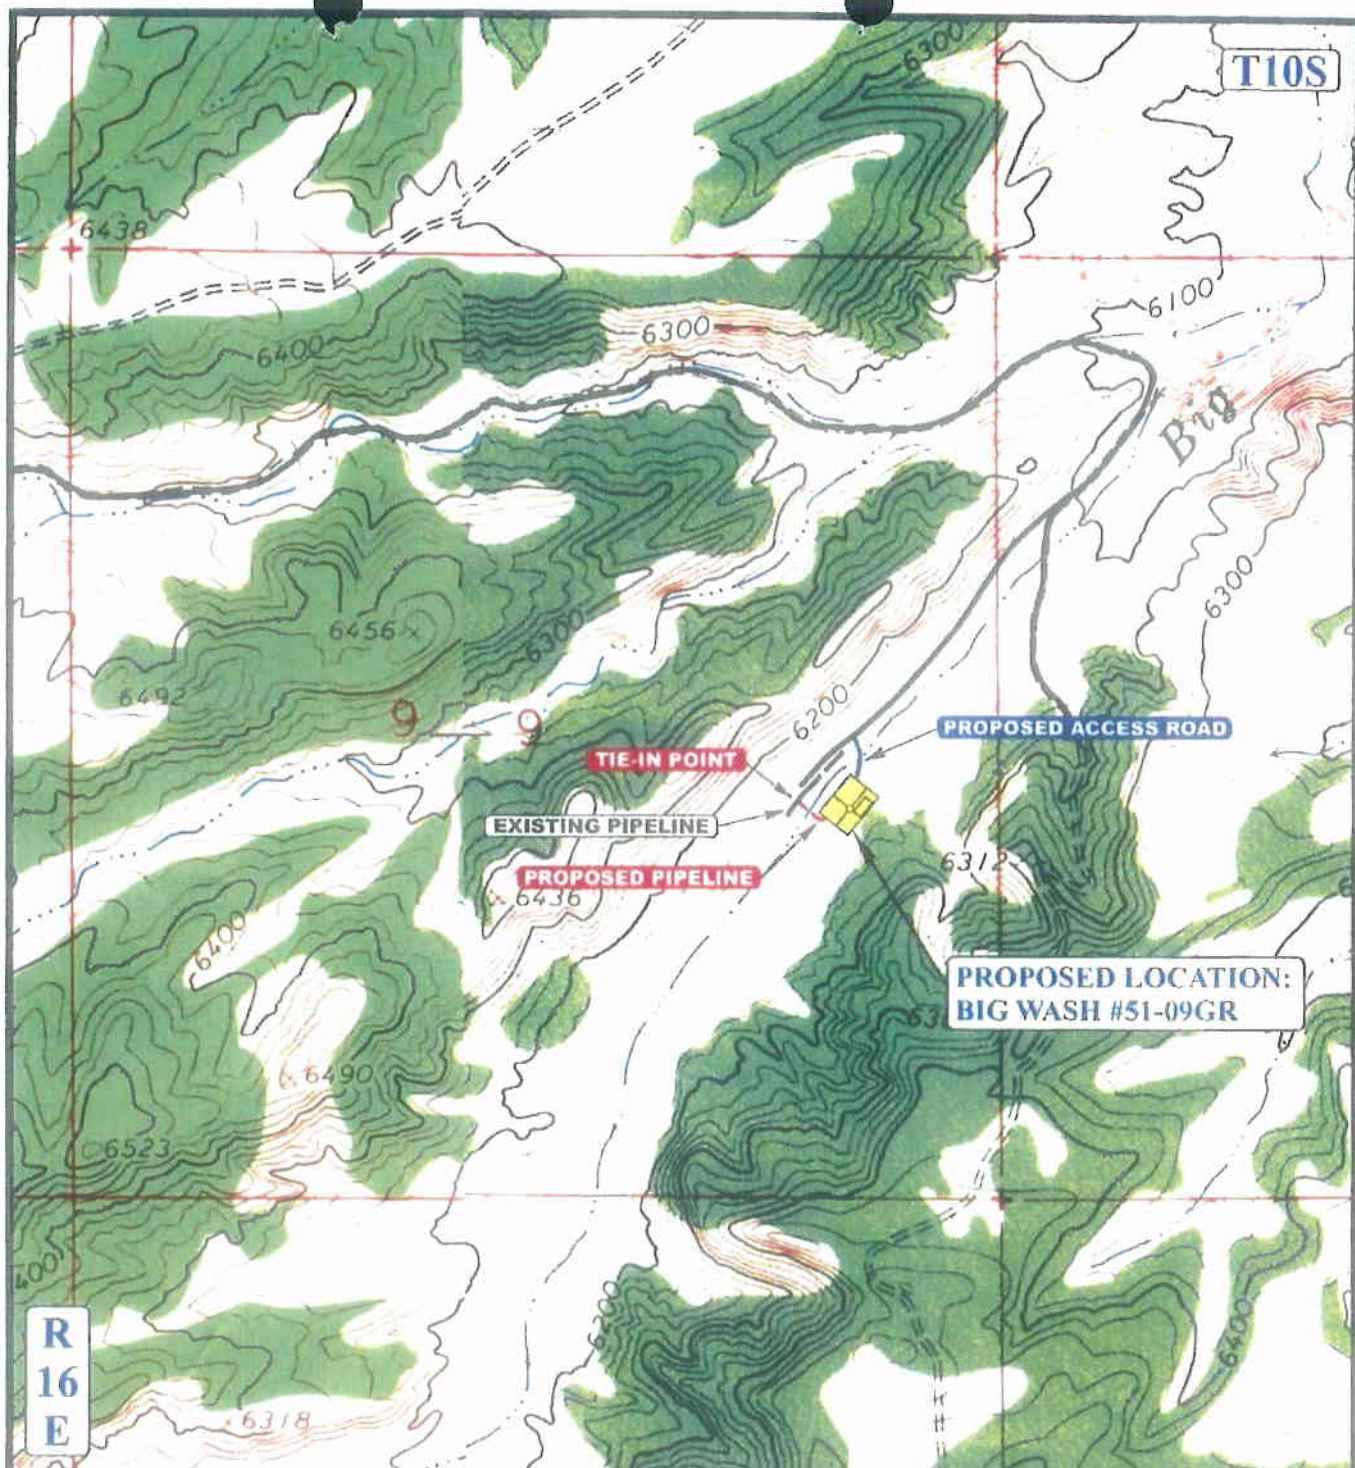

APPROXIMATE TOTAL PIPELINE DISTANCE = 215' +/-

LEGEND:

- PROPOSED ACCESS ROAD
- EXISTING PIPELINE
- - - - - PROPOSED PIPELINE
- - - - - PROPOSED PIPELINE (SERVICING OTHER WELLS)



Uintah Engineering & Land Surveying
 85 South 200 East Vernal, Utah 84078
 (435) 789-1017 * FAX (435) 789-1813



EOG RESOURCES, INC.

BIG WASH #51-09GR
SECTION 9, T10S, R16E, S.L.B.&M.
2175' FSL. 845' FEL

TOPOGRAPHIC
MAP

10 30 06
 MONTH DAY YEAR

SCALE: 1" = 1000' DRAWN BY: L.K. REVISED: 12-01-06



WORKSHEET
APPLICATION FOR PERMIT TO DRILL

APD RECEIVED: 02/15/2007

API NO. ASSIGNED: 43-013-33545

WELL NAME: BIG WASH 51-09GR

OPERATOR: EOG RESOURCES INC (N9550)

CONTACT: MARY MAESTAS

PHONE NUMBER: 303-824-5526

PROPOSED LOCATION:

NESE 09 100S 160E

SURFACE: 2175 FSL 0845 FEL

BOTTOM: 2175 FSL 0845 FEL

COUNTY: DUCHESNE

LATITUDE: 39.95713 LONGITUDE: -110.1172

UTM SURF EASTINGS: 575408 NORTHINGS: 4423162

FIELD NAME: WILDCAT (1)

INSPECT LOCATN BY: / /		
Tech Review	Initials	Date
Engineering		
Geology		
Surface		

LEASE TYPE: 1 - Federal

LEASE NUMBER: UTU-82698

SURFACE OWNER: 1 - Federal

PROPOSED FORMATION: GRRV

COALBED METHANE WELL? NO

RECEIVED AND/OR REVIEWED:

☒ Plat
☒ Bond: Fed[1] Ind[] Sta[] Fee[]
(No. NM 2308)
☒ Potash (Y/N)
☒ Oil Shale 190-5 (B) or 190-3 or 190-13
☒ Water Permit
(No. 49-1501)
☒ RDCC Review (Y/N)
(Date:)
☒ Fee Surf Agreement (Y/N)
☒ Intent to Commingle (Y/N)

LOCATION AND SITING:

___ R649-2-3.
Unit: ___
☒ R649-3-2. General
Siting: 460 From Qtr/Qtr & 920' Between Wells
___ R649-3-3. Exception
___ Drilling Unit
Board Cause No: ___
Eff Date: ___
Siting: ___
___ R649-3-11. Directional Drill

COMMENTS: _____

STIPULATIONS: _____

1- *Redevelop*
2- *Spacing*

T9S R16E
T10S R16E

WELLS DRAW
18-05GR

5

4

BIG WASH
25-04GR

•

WELLS DRAW
53-08GR

BIG WASH
50-09GR

8

9

BIG WASH
51-09GR

BIG WASH
61-16GR

OPERATOR: EOG RESOURCES INC (N9550)

SEC: 5,9 T.10S R. 16E

FIELD: WILDCAT (001)

COUNTY: DUCHESNE


SPACING: R649-3-2 / GENERAL SITING

Field Status
 ■ ABANDONED
 ■ ACTIVE
 ■ COMBINED
 ■ INACTIVE
 ■ PROPOSED
 ■ STORAGE
 ■ TERMINATED

Unit Status
 ■ EXPLORATORY
 ■ GAS STORAGE
 ■ NF PP OIL
 ■ NF SECONDARY
 ■ PENDING
 ■ PI OIL
 ■ PP GAS
 ■ PP GEOTHERML
 ■ PP OIL
 ■ SECONDARY
 ■ TERMINATED

Wells Status

✂ GAS INJECTION
 ✂ GAS STORAGE
 ✂ LOCATION ABANDONED
 ✂ NEW LOCATION
 ✂ PLUGGED & ABANDONED
 ✂ PRODUCING GAS
 ✂ PRODUCING OIL
 ✂ SHUT-IN GAS
 ✂ SHUT-IN OIL
 ✂ TEMP. ABANDONED
 ✂ TEST WELL
 ✂ WATER INJECTION
 ✂ WATER SUPPLY
 ✂ WATER DISPOSAL
 ✂ DRILLING



Utah Oil Gas and Mining



PREPARED BY: DIANA MASON
DATE: 16-FEBRUARY-2007



State of Utah

Department of Natural Resources

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas & Mining

JOHN R. BAZA
Division Director

JON M. HUNTSMAN, JR.
Governor

GARY R. HERBERT
Lieutenant Governor

February 21, 2007

EOG Resources, Inc.
1060 East Highway 40
Vernal, UT 84078

Re: Big Wash 51-09GR Well, 2175' FSL, 845' FEL, NE SE, Sec. 9, T. 10 South,
R. 16 East, Duchesne County, Utah

Gentlemen:

Pursuant to the provisions and requirements of Utah Code Ann. § 40-6-1 *et seq.*, Utah Administrative Code R649-3-1 *et seq.*, and the attached Conditions of Approval, approval to drill the referenced well is granted.

This approval shall expire one year from the above date unless substantial and continuous operation is underway, or a request for extension is made prior to the expiration date. The API identification number assigned to this well is 43-013-33545.

Sincerely,

A handwritten signature in black ink, appearing to read "Gil Hunt".

Gil Hunt
Associate Director

pab
Enclosures

cc: Duchesne County Assessor
Bureau of Land Management, Vernal District Office

Operator: EOG Resources, Inc.
Well Name & Number Big Wash 51-09GR
API Number: 43-013-33545
Lease: UTU-82698

Location: NE SE Sec. 9 T. 10 South R. 16 East

Conditions of Approval

1. General

Compliance with the requirements of Utah Admin. R. 649-1 *et seq.*, the Oil and Gas Conservation General Rules, and the applicable terms and provisions of the approved Application for permit to drill.

2. Notification Requirements

Notify the Division with 24 hours of spudding the well.

- Contact Carol Daniels at (801) 538-5284.

Notify the Division prior to commencing operations to plug and abandon the well.

- Contact Dustin Doucet at (801) 538-5281 office
(801) 733-0983 home

3. Reporting Requirements

All required reports, forms and submittals will be promptly filed with the Division, including but not limited to the Entity Action Form (Form 6), Report of Water Encountered During Drilling (Form 7), Weekly Progress Reports for drilling and completion operations, and Sundry Notices and Reports on Wells requesting approval of change of plans or other operational actions.

4. State approval of this well does not supersede the required federal approval, which must be obtained prior to drilling.

5. This proposed well is located in an area for which drilling units (well spacing patterns) have not been established through an order of the Board of Oil, Gas and Mining (the "Board"). In order to avoid the possibility of waste or injury to correlative rights, the operator is requested, once the well has been drilled, completed, and has produced, to analyze geological and engineering data generated therefrom, as well as any similar data from surrounding areas if available. As soon as is practicable after completion of its analysis, and if the analysis suggests an area larger than the quarter-quarter section upon which the well is located is being drained, the operator is requested to seek an appropriate order from the Board establishing drilling and spacing units in conformance with such analysis by filing a Request for Agency Action with the Board.

RECEIVED
VERNAL FIELD OFFICE

FORM APPROVED
OMB No. 1004-0137
Expires March 31, 2007

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

2007 FEB 15 PM 3:56

APPLICATION FOR PERMIT TO DRILL OR REENTER

1a. Type of work: <input checked="" type="checkbox"/> DRILL <input type="checkbox"/> REENTER		6. Lease Serial No. UTU-82698
1b. Type of Well: <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Single Zone <input type="checkbox"/> Multiple Zone		7. If Indian, Allottee or Tribe Name
2. Name of Operator EOG RESOURCES, INC		8. Lease Name and Well No. Big Wash 51-09GR
3a. Address 1060 EAST HIGHWAY 40 VERNAL, UT 84078	3b. Phone No. (include area code) 303-824-5526	9. API Well No. 43-013-33545
4. Location of Well (Report location clearly and in accordance with any State requirements.)* At surface 2175' FSL & 845' FEL (NESE) 39.957106 LAT 110.117897 LON At proposed prod. zone Same		10. Field and Pool, or Exploratory Natural Buttes/Green River
14. Distance in miles and direction from nearest town or post office* 21.6 miles south of Myton, Utah		11. Sec., T. R. M. or Blk. and Survey or Area Sec. 9-T10S-R16E, S.L.B.&M
15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line, if any) 660' Lease line 660' Drilling Unit Line	16. No. of acres in lease 960	17. Spacing Unit dedicated to this well 40 acres
18. Distance from proposed location* to nearest well, drilling, completed, applied for, on this lease, ft.	19. Proposed Depth 5450	20. BLM/BIA Bond No. on file NM 2308
21. Elevations (Show whether DF, KDB, RT, GL, etc.) 6160' GL	22. Approximate date work will start*	23. Estimated duration 45 days

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, must be attached to this form:

- Well plat certified by a registered surveyor.
- A Drilling Plan.
- A Surface Use Plan (if the location is on National Forest System Lands, the SUPO must be filed with the appropriate Forest Service Office).
- Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
- Operator certification
- Such other site specific information and/or plans as may be required by the BLM.

25. Signature <i>Mary A. Maestas</i>	Name (Printed/Typed) Mary A. Maestas	Date 02/14/2007
Title Regulatory Assistant		

Approved by (Signature) <i>Jerry Kewczka</i>	Name (Printed/Typed) JERRY KEWCZKA	Date 11-26-2007
Title Assistant Field Manager Lands & Mineral Resources		
Office VERNAL FIELD OFFICE		

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.
Conditions of approval, if any, are attached.

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

*(Instructions on page 2)

NOTICE OF APPROVAL

CONDITIONS OF APPROVAL ATTACHED

RECEIVED

DEC 05 2007

DIV. OF OIL, GAS & MINING

NOS 11/16/06
07PP0979A



UNITED STATES DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT
VERNAL FIELD OFFICE

170 South 500 East VERNAL, UT 84078 (435) 781-4400



CONDITIONS OF APPROVAL FOR APPLICATION FOR PERMIT TO DRILL

Company: EOG Resources Location: NESE, Sec 9, T10S, R16E
Well No: Big Wash 51-09GR Lease No: UTU-82698
API No: 43-013-33545 Agreement: N/A

Title	Name	Office Phone Number	Cell Phone Number
Petroleum Engineer:	Matt Baker	(435) 781-4490	(435) 828-4470
Petroleum Engineer:	Michael Lee	(435) 781-4432	(435) 828-7875
Petroleum Engineer:	James Ashley	(435) 781-4470	(435) 828-7874
Petroleum Engineer:	Ryan Angus	(435) 781-4430	(435) 828-7368
Supervisory Petroleum Technician:	Jamie Sparger	(435) 781-4502	(435) 828-3913
NRS/Enviro Scientist:	Paul Buhler	(435) 781-4475	(435) 828-4029
NRS/Enviro Scientist:	Karl Wright	(435) 781-4484	(435) 828-7381
NRS/Enviro Scientist:	Holly Villa	(435) 781-4404	
NRS/Enviro Scientist:		(435) 781-4476	
NRS/Enviro Scientist:	Chuck MacDonald	(435) 781-4441	(435) 828-7481
NRS/Enviro Scientist:	Jannice Cutler	(435) 781-3400	(435) 828-3544
NRS/Enviro Scientist:	Michael Cutler	(435) 781-3401	(435) 828-3546
NRS/Enviro Scientist:	Anna Figueroa	(435) 781-3407	(435) 828-3548
NRS/Enviro Scientist:	Verlyn Pindell	(435) 781-3402	(435) 828-3547
NRS/Enviro Scientist:	Darren Williams	(435) 781-4447	
NRS/Enviro Scientist:	Nathan Packer	(435) 781-3405	(435) 828-3545

Fax: (435) 781-3420

**A COPY OF THESE CONDITIONS SHALL BE FURNISHED TO YOUR
FIELD REPRESENTATIVE TO INSURE COMPLIANCE**

All lease and/or unit operations are to be conducted in such a manner that full compliance is made with the applicable laws, regulations (43 CFR Part 3160), and this approved Application for Permit to Drill including Surface and Downhole Conditions of Approval. The operator is considered fully responsible for the actions of his subcontractors. A copy of the approved APD must be on location during construction, drilling, and completion operations. **This permit is approved for a two (2) year period, or until lease expiration, whichever occurs first. An additional extension, up to two (2) years, may be applied for by sundry notice prior to expiration.**

NOTIFICATION REQUIREMENTS

Location Construction (Notify Environmental Scientist)	- Forty-Eight (48) hours prior to construction of location and access roads.
Location Completion (Notify Environmental Scientist)	- Prior to moving on the drilling rig.
Spud Notice (Notify Petroleum Engineer)	- Twenty-Four (24) hours prior to spudding the well.
Casing String & Cementing (Notify Supv. Petroleum Tech.)	- Twenty-Four (24) hours prior to running casing and cementing all casing strings.
BOP & Related Equipment Tests (Notify Supv. Petroleum Tech.)	- Twenty-Four (24) hours prior to initiating pressure tests.
First Production Notice (Notify Petroleum Engineer)	- Within Five (5) business days after new well begins or production resumes after well has been off production for more than ninety (90) days.

**SURFACE USE PROGRAM
CONDITIONS OF APPROVAL (COAs)**

General Surface COAs:

- If there is an active Gilsonite mining operation within 2 miles of the well location, operator shall notify the Gilsonite operator at least 48 hours prior to any blasting during construction.
- If paleontological materials are uncovered during construction, the operator is to immediately stop work and contact the Authorized Officer (AO). A determination will be made by the AO as to what mitigation may be necessary for the discovered paleontologic material before construction can continue.

Specific Surface COAs:

- The lessee/operator is given notice that lands in the lease have been identified as containing crucial deer and elk winter range. It is requested that the lessee/operator not initiate surface disturbing activities or drilling from December 1st through April 30th. A survey may be conducted by a qualified biologist or a BLM representative during this timing period to determine if deer or elk are in the area.
- 4 to 6 inches of topsoil should be stripped from the location and windrowed as shown on the cut sheet. The topsoil shall then be broadcast seeded with the recommended seed mix immediately after it has been windrowed and the seed walked into the soil with a dozer.
- The topsoil from the reserve pit should be stripped and piled separately near the reserve pit. When the reserve pit is closed, it shall be recontoured and the topsoil respread, and the area shall be seeded in the same manner as the location topsoil.
- Once the location is plugged and abandoned, it shall be recontoured to natural contours, topsoil respread where appropriate, and the entire location seeded with the recommended seed mix. Seeding should take place by broadcasting the seed and walking it into the soil with a dozer immediately after the dirt work is completed.
- As discussed on the onsite conducted on November 21, 2006 the operator will work with Duchesne County for a Right-of-Way and appropriate applications to reroute and upgrade county roads.
- The following final seed mixture shall be used:

Type		lbs./acre
Wyoming sagebrush	<i>Artemesia wyomingensis</i>	3
Four-wing saltbush	<i>Atriplex canescens</i>	2
Indian Rice grass	<i>Stipa hymenoides</i>	2
Crested Wheat grass	<i>Agropyron cristatum</i>	1
** Seed should be drilled; but if broadcasted double the pounds per acre used and work the solids mechanically to cover the seed.		

Other reclamation methods including but not limited to mulching or soil treatments may be required on a site-specific basis.

- The best method to avoid entrainment is to pump from an off-channel location-one that does not connect to the river during high spring flows. An infiltration gallery constructed in a BLM and Service approved location is best.
- If the pump head is located in the river channel where larval fish are known to occur, the following measures apply:
 - a. do not situate the pump in a low-flow or no-flow area as these habitats tend to concentrate larval fishes;
 - b. limit the amount of pumping, to the greatest extent possible, during that period of the year when larval fish may be present (see above); and
 - c. limit the amount of pumping, to the greatest extent possible, during the pre-dawn hours as larval drift studies indicate that this is a period of greatest daily activity.
- Screen all pump intakes with ¼" mesh material.
- Report any fish impinged on the intake screen to the Service (801.975.3330) and the Utah Division of Wildlife Resources:

Northeastern Region
152 East 100 North, Vernal, UT 84078
Phone: (435) 781-9453

DOWNHOLE CONDITIONS OF APPROVAL

SITE SPECIFIC DOWNHOLE CONDITIONS OF APPROVAL

- The top of the production casing cement shall extend a minimum of 200 feet above the surface casing shoe.
- Variance Granted:
 - 75 foot long blooie line approved.

All provisions outlined in Onshore Oil & Gas Order #2 Drilling Operations shall be strictly adhered to. The following items are emphasized:

DRILLING/COMPLETION/PRODUCING OPERATING STANDARDS

- The spud date and time shall be reported orally to Vernal Field Office within 24 hours of spudding.
- Notify Vernal Field Office Supervisory Petroleum Engineering Technician at least 24 hours in advance of casing cementing operations and BOPE & casing pressure tests.
- Blowout prevention equipment (BOPE) shall remain in use until the well is completed or abandoned. Closing unit controls shall remain unobstructed and readily accessible at all times. Choke manifolds shall be located outside of the rig substructure.
- All BOPE components shall be inspected daily and those inspections shall be recorded in the daily drilling report. Components shall be operated and tested as required by Onshore Oil & Gas Order No. 2 to insure good mechanical working order. All BOPE pressure tests shall be performed by a test pump with a chart recorder and **NOT** by the rig pumps. Test shall be reported in the driller's log.
- BOP drills shall be initially conducted by each drilling crew within 24 hours of drilling out from under the surface casing and weekly thereafter as specified in Onshore Oil & Gas Order No. 2.
- Casing pressure tests are required before drilling out from under all casing strings set and cemented in place.
- No aggressive/fresh hard-banded drill pipe shall be used within casing.
- **Cement baskets shall not be run on surface casing.**
- The operator must report all shows of water or water-bearing sands to the BLM. If flowing water is encountered it must be sampled, analyzed, and a copy of the analyses submitted to the BLM Vernal Field Office.
- The operator must report encounters of all non oil & gas mineral resources (such as Gilsonite, tar sands, oil shale, trona, etc.) to the Vernal Field Office, in writing, within 5 working days of each encounter. Each report shall include the well name/number, well location, date and depth (from KB or GL) of encounter, vertical footage of the encounter

and, the name of the person making the report (along with a telephone number) should the BLM need to obtain additional information.

- A complete set of angular deviation and directional surveys of a directional well will be submitted to the Vernal BLM office engineer within 30 days of the completion of the well.
- Chronologic drilling progress reports shall be filed directly with the BLM, Vernal Field Office on a weekly basis in sundry, letter format or e-mail to the Petroleum Engineers until the well is completed.
- A cement bond log (CBL) will be run from the production casing shoe to the top of cement and shall be utilized to determine the bond quality for the production casing. Submit a field copy of the CBL to this office.
- **Please submit an electronic copy of all other logs run on this well in LAS format to UT_VN_Welllogs@BLM.gov. This submission will supersede the requirement for submittal of paper logs to the BLM.**
- There shall be no deviation from the proposed drilling, completion, and/or workover program as approved. Safe drilling and operating practices must be observed. Any changes in operation must have prior approval from the BLM Vernal Field Office.

OPERATING REQUIREMENT REMINDERS:

- All wells, whether drilling, producing, suspended, or abandoned, shall be identified in accordance with 43 CFR 3162.6. There shall be a sign or marker with the name of the operator, lease serial number, well number, and surveyed description of the well.
- In accordance with 43 CFR 3162.4-3, this well shall be reported on the "Monthly Report of Operations" (Oil and Gas Operations Report ((OGOR)) starting with the month in which operations commence and continue each month until the well is physically plugged and abandoned. This report shall be filed in duplicate, directly with the Minerals Management Service, P.O. Box 17110, Denver, Colorado 80217-0110, or call 1-800-525-7922 (303) 231-3650 for reporting information.
- Should the well be successfully completed for production, the BLM Vernal Field office must be notified when it is placed in a producing status. Such notification will be by written communication and must be received in this office by not later than the fifth business day following the date on which the well is placed on production. The notification shall provide, as a minimum, the following informational items:
 - Operator name, address, and telephone number.
 - Well name and number.
 - Well location (¼¼, Sec., Twn, Rng, and P.M.).
 - Date well was placed in a producing status (date of first production for which royalty will be paid).
 - The nature of the well's production, (i.e., crude oil, or crude oil and casing head gas, or natural gas and entrained liquid hydrocarbons).
 - The Federal or Indian lease prefix and number on which the well is located; otherwise the non-Federal or non-Indian land category, i.e., State or private.
 - Unit agreement and/or participating area name and number, if applicable.
 - Communitization agreement number, if applicable.
- Any venting or flaring of gas shall be done in accordance with Notice to Lessees (NTL) 4A and needs prior approval from the BLM Vernal Field Office.
- All undesirable events (fires, accidents, blowouts, spills, discharges) as specified in NTL 3A will be reported to the BLM, Vernal Field Office. Major events, as defined in NTL3A, shall be reported verbally within 24 hours, followed by a written report within 15 days. "Other than Major Events" will be reported in writing within 15 days. "Minor Events" will be reported on the Monthly Report of Operations and Production.
- Whether the well is completed as a dry hole or as a producer, "Well Completion and Recompletion Report and Log" (BLM Form 3160-4) shall be submitted not later than 30 days after completion of the well or after completion of operations being performed, in accordance with 43 CFR 3162.4-1. Two copies of all logs run, core descriptions, and all other surveys or data obtained and compiled during the drilling, workover, and/or completion operations, shall be filed on BLM Form 3160-4. Submit with the well completion report a geologic report including,

at a minimum, formation tops, and a summary and conclusions. Also include deviation surveys, sample descriptions, strip logs, core data, drill stem test data, and results of production tests if performed. Samples (cuttings, fluid, and/or gas) shall be submitted only when requested by the BLM, Vernal Field Office.

- All off-lease storage, off-lease measurement, or commingling on-lease or off-lease, shall have prior written approval from the BLM Vernal Field Office.
- Oil and gas meters shall be calibrated in place prior to any deliveries. The BLM Vernal Field Office Petroleum Engineers will be provided with a date and time for the initial meter calibration and all future meter proving schedules. A copy of the meter calibration reports shall be submitted to the BLM Vernal Field Office. All measurement facilities will conform to the API standards for liquid hydrocarbons and the AGA standards for natural gas measurement. All measurement points shall be identified as the point of sale or allocation for royalty purposes.
- A schematic facilities diagram as required by Onshore Oil & Gas Order No. 3 shall be submitted to the BLM Vernal Field Office within 30 days of installation or first production, whichever occurs first. All site security regulations as specified in Onshore Oil & Gas Order No. 3 shall be adhered to. All product lines entering and leaving hydrocarbon storage tanks will be effectively sealed in accordance with Onshore Oil & Gas Order No. 3.
- Any additional construction, reconstruction, or alterations of facilities, including roads, gathering lines, batteries, etc., which will result in the disturbance of new ground, shall require the filing of a suitable plan and need prior approval of the BLM Vernal Field Office. Emergency approval may be obtained orally, but such approval does not waive the written report requirement.
- No location shall be constructed or moved, no well shall be plugged, and no drilling or workover equipment shall be removed from a well to be placed in a suspended status without prior approval of the BLM Vernal Field Office. If operations are to be suspended for more than 30 days, prior approval of the BLM Vernal Field Office shall be obtained and notification given before resumption of operations.
- Pursuant to Onshore Oil & Gas Order No. 7, this is authorization for pit disposal of water produced from this well for a period of 90 days from the date of initial production. A permanent disposal method must be approved by this office and in operation prior to the end of this 90-day period. In order to meet this deadline, an application for the proposed permanent disposal method shall be submitted along with any necessary water analyses, as soon as possible, but no later than 45 days after the date of first production. Any method of disposal which has not been approved prior to the end of the authorized 90-day period will be considered as an Incident of Noncompliance and will be grounds for issuing a shut-in order until an acceptable manner for disposing of said water is provided and approved by this office.
- Unless the plugging is to take place immediately upon receipt of oral approval, the Field Office Petroleum Engineers must be notified at least 24 hours in advance of the plugging of the well, in order that a representative may witness plugging operations. If a well is suspended or abandoned, all pits must be fenced immediately until they are backfilled. The "Subsequent Report of Abandonment" (Form BLM 3160-5) must be submitted within 30 days after the actual plugging of the well bore, showing location of plugs, amount of cement in each, and amount of casing left in hole, and the current status of the surface restoration.

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-82698
		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____		7. UNIT or CA AGREEMENT NAME: Sheep Wash Unit
2. NAME OF OPERATOR: EOG Resources, Inc.		8. WELL NAME and NUMBER: Big Wash 51-09GR
3. ADDRESS OF OPERATOR: 600 17th Street, Suite 1000N CITY Denver STATE CO ZIP 80202		9. API NUMBER: 43-013-33545
4. LOCATION OF WELL FOOTAGES AT SURFACE: 2175' FSL & 845' FEL 39.957106 LAT 110.117897 LON QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: NESE 9 10S 16E S.L.B. & M		10. FIELD AND POOL, OR WILDCAT: Natural Buttes/Green River COUNTY: Duchesne STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA			
TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> ALTER CASING <input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> DEEPEN <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> PLUG BACK <input type="checkbox"/> PRODUCTION (START/RESUME) <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	<input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> TEMPORARILY ABANDON <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> WATER DISPOSAL <input type="checkbox"/> WATER SHUT-OFF <input checked="" type="checkbox"/> OTHER: APD EXTENSION REQUEST
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____			

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

EOG Resources, Inc. respectfully requests the APD for the referenced well be extended for one year.

Approved by the
Utah Division of
Oil, Gas and Mining

Date: 02-20-08
By: [Signature]

COPY SENT TO OPERATOR
Date: 2-21-2008
Initials: KS

NAME (PLEASE PRINT) <u>Mary A. Maestas</u>	TITLE <u>Regulatory Assistant</u>
SIGNATURE <u>[Signature]</u>	DATE <u>2/15/2008</u>

(This space for State use only)

RECEIVED
FEB 19 2008
DIV. OF OIL, GAS & MINING

RESET

**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 43-013-33545
Well Name: Big Wash 51-09GR
Location: 2175 FSL 845 FEL (NESE), SECTION 9, T10S, R16E S.L.B.&M
Company Permit Issued to: EOG RESOURCES, INC.
Date Original Permit Issued: 2/21/2007

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes ☐ No ☐

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes ☐ No ☒


Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes ☐ No ☒

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes ☐ No ☒

Has the approved source of water for drilling changed? Yes ☐ No ☒

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes ☐ No ☒

Is bonding still in place, which covers this proposed well? Yes ☒ No ☐


Signature

2/15/2008

Date

Title: Regulatory Assistant

Representing: EOG Resources, Inc.

RECEIVED

FEB 19 2008

DIV. OF OIL, GAS & MINING

STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES
DIVISION OF OIL, GAS AND MINING

FORM 9

SUNDRY NOTICES AND REPORTS ON WELLS

Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.

1. TYPE OF WELL OIL WELL <input type="checkbox"/> GAS WELL <input checked="" type="checkbox"/> OTHER _____		5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-82698
2. NAME OF OPERATOR: EOG Resources, Inc.		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
3. ADDRESS OF OPERATOR: 1060 East Highway 40 Vernal UT 84078		7. UNIT or CA AGREEMENT NAME: Sheep Wash Unit
4. LOCATION OF WELL FOOTAGES AT SURFACE: 2175' FSL & 845' FEL 39.957106 LAT 110.117897 LON QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: NESE 9 10S 16E S.L.B. & M		8. WELL NAME and NUMBER: Big Wash 51-09GR
PHONE NUMBER: (453) 781-9145		9. API NUMBER: 43-013-33545
		10. FIELD AND POOL, OR WILDCAT: Natural Buttes/Green River

COUNTY: Duchesne

STATE: UTAH

11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION		
<input checked="" type="checkbox"/> NOTICE OF INTENT (Submit in Duplicate) Approximate date work will start: _____	<input type="checkbox"/> ACIDIZE	<input type="checkbox"/> DEEPEN	<input type="checkbox"/> REPERFORATE CURRENT FORMATION
	<input type="checkbox"/> ALTER CASING	<input type="checkbox"/> FRACTURE TREAT	<input type="checkbox"/> SIDETRACK TO REPAIR WELL
	<input type="checkbox"/> CASING REPAIR	<input type="checkbox"/> NEW CONSTRUCTION	<input type="checkbox"/> TEMPORARILY ABANDON
	<input type="checkbox"/> CHANGE TO PREVIOUS PLANS	<input type="checkbox"/> OPERATOR CHANGE	<input type="checkbox"/> TUBING REPAIR
	<input type="checkbox"/> CHANGE TUBING	<input type="checkbox"/> PLUG AND ABANDON	<input type="checkbox"/> VENT OR FLARE
<input type="checkbox"/> SUBSEQUENT REPORT (Submit Original Form Only) Date of work completion: _____	<input type="checkbox"/> CHANGE WELL NAME	<input type="checkbox"/> PLUG BACK	<input type="checkbox"/> WATER DISPOSAL
	<input type="checkbox"/> CHANGE WELL STATUS	<input type="checkbox"/> PRODUCTION (START/RESUME)	<input type="checkbox"/> WATER SHUT-OFF
	<input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS	<input type="checkbox"/> RECLAMATION OF WELL SITE	<input checked="" type="checkbox"/> OTHER: <u>APD EXTENSION REQUEST</u>
	<input type="checkbox"/> CONVERT WELL TYPE	<input type="checkbox"/> RECOMPLETE - DIFFERENT FORMATION	

12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc.

EOG Resources, Inc. respectfully requests the APD for the referenced well be extended for one year.

Approved by the
Utah Division of
Oil, Gas and Mining

Date: 02-05-09
By: [Signature]

NAME (PLEASE PRINT) <u>Mickenzie Thacker</u>	TITLE <u>Operations Clerk</u>
SIGNATURE <u>[Signature]</u>	DATE <u>1/29/2009</u>

(This space for State use only)

COPY SENT TO OPERATOR

Date: 2.5.2009

Initials: KS

(5/2000)

(See Instructions on Reverse Side)

RECEIVED

FEB 02 2009

DIV. OF OIL, GAS & MINING

**Application for Permit to Drill
Request for Permit Extension
Validation**

(this form should accompany the Sundry Notice requesting permit extension)

API: 43-013-33545
Well Name: Big Wash 51-09GR
Location: 2175 FSL 845 FEL (NESE), SECTION 9, T10S, R16E S.L.B.&M
Company Permit Issued to: EOG Resources, Inc.
Date Original Permit Issued: 2/21/2007

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision.

Following is a checklist of some items related to the application, which should be verified.

If located on private land, has the ownership changed, if so, has the surface agreement been updated? Yes ☐ No ☐

Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? Yes ☐ No ☒

Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? Yes ☐ No ☒

Have there been any changes to the access route including ownership, or right-of-way, which could affect the proposed location? Yes ☐ No ☒

Has the approved source of water for drilling changed? Yes ☐ No ☒

Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? Yes ☐ No ☒

Is bonding still in place, which covers this proposed well? Yes ☒ No ☐

Michelle Thacker
Signature

1/29/2009

Date

Title: Operations Clerk

Representing: EOG Resources, Inc.

RECEIVED

FEB 02 2009

DIV. OF OIL, GAS & MINING

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

RECEIVED

NOV 04 2009

FORM APPROVED
OMB NO. 1004-0135
Expires: July 31, 2010

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.

BLM

SUBMIT IN TRIPLICATE - Other instructions on reverse side.

1. Type of Well <input type="checkbox"/> Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other		5. Lease Serial No. UTU82698
2. Name of Operator EOG RESOURCES INC		6. If Indian, Allottee or Tribe Name
Contact: MICKENZIE GATES E-Mail: MICKENZIE_gates@EOGRESOURCES.COM		7. If Unit or CA/Agreement, Name and/or No.
3a. Address 1060 EAST HIGHWAY 40 VERNAL, UT 84078	3b. Phone No. (include area code) Ph: 453.781.9145	8. Well Name and No. BIG WASH 51-09GR
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) Sec 9 T10S R16E NESE 2175FSL 845FEL		9. API Well No. 43-013-33545-00-X1
		10. Field and Pool, or Exploratory NATURAL BUTTES
		11. County or Parish, and State DUCHESNE COUNTY, UT

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	Change to Original
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	PD

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

EOG Resources, Inc. respectfully requests the APD for the referenced well be extended for two years.

RECEIVED

DEC 22 2009

DIV. OF OIL, GAS & MINING

VERNAL DIST.

ENG. _____

GEOL. _____

E.S. _____


PWT. _____

A.M. _____

CONDITIONS OF APPROVAL ATTACHED

14. I hereby certify that the foregoing is true and correct. Electronic Submission #76814 verified by the BLM Well Information System For EOG RESOURCES INC, sent to the Vernal Committed to AFMSS for processing by GAIL JENKINS on 11/04/2009 (10GXJ0557SE)	
Name (Printed/Typed) MICKENZIE GATES	Title OPERATIONS CLERK
Signature (Electronic Submission)	Date 11/04/2009

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved By 	Title Petroleum Engineer NOV 18 2009
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

UDOGM

** BLM REVISED ** BLM REVISED ** BLM REVISED ** BLM REVISED ** BLM REVISED **

CONDITIONS OF APPROVAL

EOG Resources, Inc.

Notice of Intent APD Extension

Lease: UTU-82698
Well: Big Wash 51-09GR
Location: NESE Sec 9-T10S-R16E

An extension for the referenced APD is granted with the following conditions:

1. The extension and APD shall expire on 11/26/2011.
2. No other extension shall be granted.

If you have any other questions concerning this matter, please contact Ryan Angus of this office at (435) 781-4430.

RECEIVED

DEC 22 2009

DIV. OF OIL, GAS & MINING

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9			
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-82698			
1. TYPE OF WELL Gas Well		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:			
2. NAME OF OPERATOR: EOG Resources, Inc.		7. UNIT or CA AGREEMENT NAME:			
3. ADDRESS OF OPERATOR: 600 17th Street, Suite 1000 N, Denver, CO, 80202		8. WELL NAME and NUMBER: BIG WASH 51-09GR			
4. LOCATION OF WELL FOOTAGES AT SURFACE: 2175 FSL 0845 FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NESE Section: 09 Township: 10.0S Range: 16.0E Meridian: S		9. API NUMBER: 43013335450000			
PHONE NUMBER: 435 781-9111 Ext		9. FIELD and POOL or WILDCAT: WILDCAT			
COUNTY: DUCHESNE		STATE: UTAH			
11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA					
TYPE OF SUBMISSION	TYPE OF ACTION				
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 1/25/2010 <input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion: <input type="checkbox"/> SPUD REPORT Date of Spud: <input type="checkbox"/> DRILLING REPORT Report Date:	<table style="width: 100%; border: none;"> <tr> <td style="width: 33%; vertical-align: top;"> <input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION </td> <td style="width: 33%; vertical-align: top;"> <input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER </td> <td style="width: 33%; vertical-align: top;"> <input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER: _____ </td> </tr> </table>		<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER: _____
<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION OTHER: _____			
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc. EOG Resources, Inc. respectfully requests the APD for the referenced well be extended for one year.					
Approved by the Utah Division of Oil, Gas and Mining					
Date: <u>January 25, 2010</u>					
By:					
NAME (PLEASE PRINT) Mary Maestas	PHONE NUMBER 303 824-5526	TITLE Regulatory Assistant			
SIGNATURE N/A	DATE 1/25/2010				

RECEIVED January 25, 2010



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43013335450000

API: 43013335450000

Well Name: BIG WASH 51-09GR

Location: 2175 FSL 0845 FEL QTR NESE SEC 09 TWP 100S RNG 160E MER S

Company Permit Issued to: EOG RESOURCES, INC.

Date Original Permit Issued: 2/21/2007

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? ☐ Yes ☒ No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? ☐ Yes ☒ No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? ☐ Yes ☒ No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? ☐ Yes ☒ No
- Has the approved source of water for drilling changed? ☐ Yes ☒ No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? ☐ Yes ☒ No
- Is bonding still in place, which covers this proposed well? ☒ Yes ☐ No

**Approved by the
Utah Division of
Oil, Gas and Mining**

Signature: Mary Maestas

Date: 1/25/2010

Title: Regulatory Assistant **Representing:** EOG RESOURCES, INC.

Date: January 25, 2010

By: 

RECEIVED January 25, 2010

STATE OF UTAH DEPARTMENT OF NATURAL RESOURCES DIVISION OF OIL, GAS, AND MINING		FORM 9
SUNDRY NOTICES AND REPORTS ON WELLS Do not use this form for proposals to drill new wells, significantly deepen existing wells below current bottom-hole depth, reenter plugged wells, or to drill horizontal laterals. Use APPLICATION FOR PERMIT TO DRILL form for such proposals.		5. LEASE DESIGNATION AND SERIAL NUMBER: UTU-82698
1. TYPE OF WELL Gas Well		6. IF INDIAN, ALLOTTEE OR TRIBE NAME:
2. NAME OF OPERATOR: EOG Resources, Inc.		7. UNIT or CA AGREEMENT NAME:
3. ADDRESS OF OPERATOR: 1060 East Highway 40, Vernal, UT, 84078		8. WELL NAME and NUMBER: BIG WASH 51-09GR
4. LOCATION OF WELL FOOTAGES AT SURFACE: 2175 FSL 0845 FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NESE Section: 09 Township: 10.0S Range: 16.0E Meridian: S		9. API NUMBER: 43013335450000
PHONE NUMBER: 435 781-9111 Ext		9. FIELD and POOL or WILDCAT: WILDCAT
4. LOCATION OF WELL FOOTAGES AT SURFACE: 2175 FSL 0845 FEL QTR/QTR, SECTION, TOWNSHIP, RANGE, MERIDIAN: Qtr/Qtr: NESE Section: 09 Township: 10.0S Range: 16.0E Meridian: S		COUNTY: DUCHESNE
STATE: UTAH		11. CHECK APPROPRIATE BOXES TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA
TYPE OF SUBMISSION	TYPE OF ACTION	
<input checked="" type="checkbox"/> NOTICE OF INTENT Approximate date work will start: 1/25/2011	<input type="checkbox"/> ACIDIZE <input type="checkbox"/> CHANGE TO PREVIOUS PLANS <input type="checkbox"/> CHANGE WELL STATUS <input type="checkbox"/> DEEPEN <input type="checkbox"/> OPERATOR CHANGE <input type="checkbox"/> PRODUCTION START OR RESUME <input type="checkbox"/> REPERFORATE CURRENT FORMATION <input type="checkbox"/> TUBING REPAIR <input type="checkbox"/> WATER SHUTOFF <input type="checkbox"/> WILDCAT WELL DETERMINATION	
<input type="checkbox"/> SUBSEQUENT REPORT Date of Work Completion:	<input type="checkbox"/> ALTER CASING <input type="checkbox"/> CHANGE TUBING <input type="checkbox"/> COMMINGLE PRODUCING FORMATIONS <input type="checkbox"/> FRACTURE TREAT <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> RECLAMATION OF WELL SITE <input type="checkbox"/> SIDETRACK TO REPAIR WELL <input type="checkbox"/> VENT OR FLARE <input type="checkbox"/> SI TA STATUS EXTENSION <input type="checkbox"/> OTHER	
<input type="checkbox"/> SPUD REPORT Date of Spud:	<input type="checkbox"/> CASING REPAIR <input type="checkbox"/> CHANGE WELL NAME <input type="checkbox"/> CONVERT WELL TYPE <input type="checkbox"/> NEW CONSTRUCTION <input type="checkbox"/> PLUG BACK <input type="checkbox"/> RECOMPLETE DIFFERENT FORMATION <input type="checkbox"/> TEMPORARY ABANDON <input type="checkbox"/> WATER DISPOSAL <input checked="" type="checkbox"/> APD EXTENSION	
<input type="checkbox"/> DRILLING REPORT Report Date:	OTHER: <input style="width: 100px;" type="text"/>	
12. DESCRIBE PROPOSED OR COMPLETED OPERATIONS. Clearly show all pertinent details including dates, depths, volumes, etc. EOG Resources, Inc. respectfully requests the APD for the referenced well be extended for one year.		
Approved by the Utah Division of Oil, Gas and Mining Date: 01/25/2011 By:		
NAME (PLEASE PRINT) Michelle Robles	PHONE NUMBER 307 276-4842	TITLE Regulatory Assistant
SIGNATURE N/A	DATE 1/25/2011	



The Utah Division of Oil, Gas, and Mining

- State of Utah
- Department of Natural Resources

Electronic Permitting System - Sundry Notices

Request for Permit Extension Validation Well Number 43013335450000

API: 43013335450000

Well Name: BIG WASH 51-09GR

Location: 2175 FSL 0845 FEL QTR NESE SEC 09 TWP 100S RNG 160E MER S

Company Permit Issued to: EOG RESOURCES, INC.

Date Original Permit Issued: 2/21/2007

The undersigned as owner with legal rights to drill on the property as permitted above, hereby verifies that the information as submitted in the previously approved application to drill, remains valid and does not require revision. Following is a checklist of some items related to the application, which should be verified.

- If located on private land, has the ownership changed, if so, has the surface agreement been updated? ☐ Yes ☒ No
- Have any wells been drilled in the vicinity of the proposed well which would affect the spacing or siting requirements for this location? ☐ Yes ☒ No
- Has there been any unit or other agreements put in place that could affect the permitting or operation of this proposed well? ☐ Yes ☒ No
- Have there been any changes to the access route including ownership, or rightof- way, which could affect the proposed location? ☐ Yes ☒ No
- Has the approved source of water for drilling changed? ☐ Yes ☒ No
- Have there been any physical changes to the surface location or access route which will require a change in plans from what was discussed at the onsite evaluation? ☐ Yes ☒ No
- Is bonding still in place, which covers this proposed well? ☒ Yes ☐ No

Signature: Michelle Robles

Date: 1/25/2011

Title: Regulatory Assistant **Representing:** EOG RESOURCES, INC.

RECEIVED January 25, 2011



GARY R. HERBERT
Governor

GREG BELL
Lieutenant Governor

State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER
Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA
Division Director

January 26, 2012

43 013 33545
Big Wash 51-09GR
10S 16E 9

Nanette Lupcho
EOG Resources, Inc.
600 17th Street, Suite 1000 N
Denver, CO 80202

Re: APDs Rescinded for EOG Resources, Inc., Uintah and Duchesne County

Dear Ms. Lupcho:

Enclosed find the list of APDs that you requested to be rescinded. No drilling activity at these locations has been reported to the division. Therefore, approval to drill these wells is hereby rescinded, effective January 25, 2012.

A new APD must be filed with this office for approval prior to the commencement of any future work on the subject location.

If any previously unreported operations have been performed on this well location, it is imperative that you notify the Division immediately.

Sincerely,

Diana Mason
Environmental Scientist

cc: Well File
Bureau of Land Management, Vernal



Big Wash 47-10GR	43-013-33533
Big Wash 44-11GR	43-013-33534
→ Big Wash 51-09GR	43-013-33545
Big Wash 50-09GR	43-013-33513
Big Wash 62-15GR	43-013-33523
Big Wash 27-03GR	43-013-33524
Big Wash 25-04GR	43-013-33525
Wilkin Ridge 36-08GR	43-013-33486
OSCU II 129-34	43-047-50082
OSCU II 127-27	43-047-40306



United States Department of the Interior

BUREAU OF LAND MANAGEMENT

Green River District-Vernal Field Office

170 South 500 East

Vernal, UT 84078

(435) 781-4400 Fax: (435) 781-4410

<http://www.blm.gov/ut/st/en/fo/vernal.html>



APR 30 2012

IN REPLY REFER TO:
3160 (UTG011)

Kaylene R. Gardner
EOG Resources, Inc.
1060 East Highway 40
Vernal, UT 84078

Re: Notice of Expiration
Well No. Big Wash 51-09GR
NESE, Sec. 9, T10S, R16E
Duchesne County, Utah
Lease No. UTU-82698

43-013-33545

Dear Ms. Gardner:

The Application for Permit to Drill (APD) for the above-referenced well was approved on November 26, 2007. A two (2) year extension request of the original APD was received on November 4, 2009. On November 18, 2009 the request was reviewed and the extension request was approved to November 26, 2011. According to our records, Federal Lease UTU-82698 expired by its own terms and conditions on November 16, 2010 with the invalidation of the Kraken Unit Agreement on September 12, 2011. The case was closed at the BLM Utah State Office on November 28, 2011. In view of the foregoing, this office is notifying you that the approval of the referenced application and lease has expired.

This office requires a letter confirming that no surface disturbance has been made for this drill site. Any surface disturbance associated with the approved location of this well is to be rehabilitated. A schedule for this rehabilitation must be submitted to this office. Your cooperation in this matter is appreciated.

If you have any questions regarding this matter, please contact Cindy Severson at (435) 781-4455.

Sincerely,

Jerry Kenczka
Assistant Field Manager
Lands & Mineral Resources

cc: UDOGM

RECEIVED

MAY 10 2012

DIV. OF OIL, GAS & MINING



GARY R. HERBERT

Governor

GREG BELL
Lieutenant Governor

State of Utah

DEPARTMENT OF NATURAL RESOURCES

MICHAEL R. STYLER

Executive Director

Division of Oil, Gas and Mining

JOHN R. BAZA

Division Director

June 14, 2012

EOG Resources, Inc.
1060 East, Hwy 40
Vernal, UT 84078

Re: APD Rescinded – Big Wash 51-09GR, Sec.9, T. 10S, R. 16E,
Duchesne County, Utah API No. 43-013-33545


Ladies and Gentlemen:

The Application for Permit to Drill (APD) for the subject well was approved by the Division of Oil, Gas and Mining (Division) on February 21, 2007. On February 20, 2008, February 5, 2009, January 25, 2010 and January 25, 2011 the Division granted a one-year APD extension. No drilling activity at this location has been reported to the division. Therefore, approval to drill the well is hereby rescinded, effective June 14, 2012.

A new APD must be filed with this office for approval prior to the commencement of any future work on the subject location.

If any previously unreported operations have been performed on this well location, it is imperative that you notify the Division immediately.

Sincerely,


Diana Mason
Environmental Scientist

cc: Well File
Bureau of Land Management, Vernal